

Position of the earthing contact acc. to IEC 60309-2

Spanung V	Frequency Hz	2P+E		3P+E		3P+N+E	
		16+32A	63+125A	16+32A	63+125A	16+32A	63+125A
63,5/110 bis 75/130	50+60					4	4
110 bis 130	50+60	4	4	4	4		
120/208 bis 144/130	50+60					9	9
220 bis 250	50+60	6	6	9	9		
220/380 bis 240/130	50+60					6	6
220/380 bis 250/440	50+60					3	3*
250/400 bis 265/460	60					11	11
277	60	5	5				
277/480 bis 280/130	50+60					7	7
347/600 bis 400/690	50+60					5	5
380 bis 415	50+60	9	9	6	6		
380; 440	50+60			3	3*		
440 bis 460	60			11	11		
480 bis 500	50+60	7	7	7	7		
600 bis 690	50+60			5	5		
über 50	100 bis 300	10*	10*	10*	10*	10*	10*
über 50	＞300 bis 500	2	2*	2	2*	2	2
ber 50 bis 250	Gleichstrom	3	3				
über 250	Gleichstrom	8	8				
Versorgung nach Trenntransformator	50+60	12	12	12	12		

* nicht standard

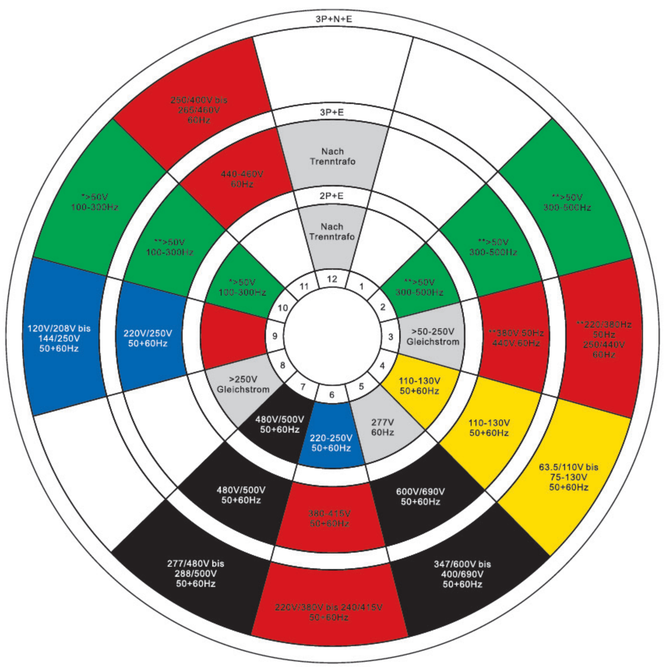

IEC 60309 plugsand socket-outlets for industrial use standards

工业插头和插座符合以下国际标准：IEC60309-1和IEC60309-2，CEIEN60309-1和CEIEN 60309-2，也符合VDE0623和BS4343.

industrial plugs and socket-outlets are in compppliance with the following international standards:IEC60309-1 & IEC60309-2, CEIEN60306-1& CEIEN60309-2

They are also in compliance with the standards:VDE 0623, BS4343.

优点 Advantage

该产品具有很好的绝缘性能，具有防水、防尘、防溅、防腐抗老化等特点，并有先进的设计，因而适用于IP44和IP67等级所需要的环境中。

Nennbetriebs spannung	Kennfarbe
20-25V	Violett
40-50V	weiB
100-130V	gelb
200-250V	blau
380-480V	rot
500-690V	schwarz
> 60-500Hz	grun
ohne kennfarbe	gra

位置或接地点
图：正面插座或连接件
Poition or the earthing contact.
View: frontside socket or connector



* keine standardausfu hrung

**keine standardausfue hrung fur 63A, 125A

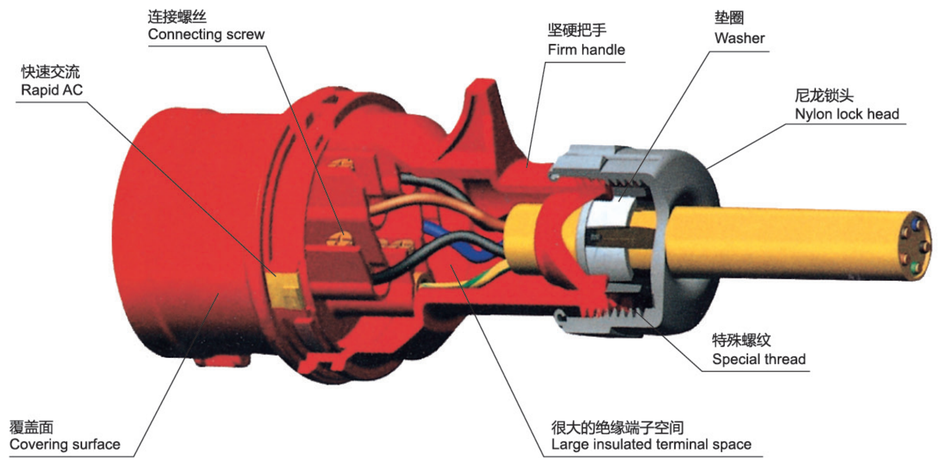

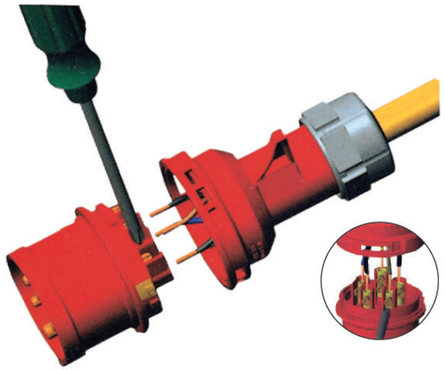

可以从一个方向达到，可以锁可以开。
May reach from one direction, in addition, can be locked and opened.

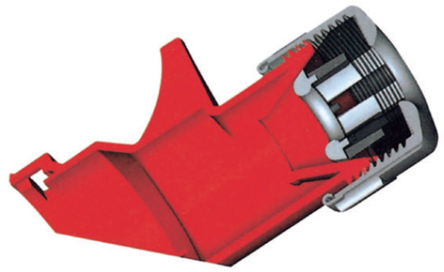

节约时间，简单插入插头，可以减轻和密封电线，在拉架电缆锁的时候，有垫圈，应付不同的电缆直径，最大化的保护电缆安全，反扭安全位置。
Save time, simply insert into the plug, lighten with sealing wire, besides, a washer parting the cable lock which can adapt to different cables diameters, protect the cable to the max extent and inversely twisting the safety position.

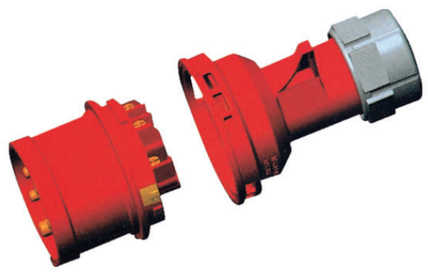

不用螺丝去装配插头和快锁系统，很容易达到锁住效果，节约时间。
Because the plug and rapid lock system aren't assembled with screw, they also can be locked easily, the time can be saved.

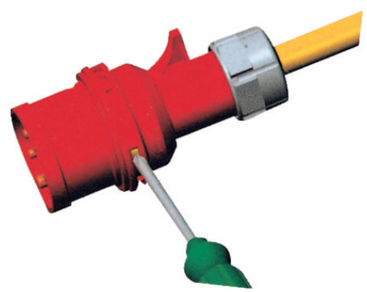

简单解锁和转动打开。
Open the lock simply and can be opened through rotating.





CE/IEC 国际标准插头 符合欧洲 / 国际标准 EN/IEC 60309-2



产品型号		SFK-247	SFK-259
接地位置		4h	
电流 (A)		16	32
尺寸 (mm)	a	140	173
	b	116	144
	c	43.5	57
	d	38.5	51
	e	17.5	25
	f	45	62
	g	58	80.7
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP44





产品型号		SFK-248	SFK-260
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	140	173
	b	116	144
	c	43.5	57
	d	38.5	51
	e	17.5	25
	f	45	62
	g	58	80.7
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP44





产品型号		SFK-252	SFK-264
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	140	173
	b	116	144
	c	49.5	57
	d	43.8	51
	e	21.5	25
	f	52	62
	g	66.7	80.7
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP44



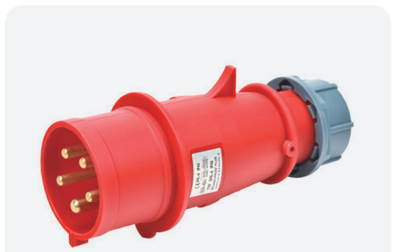

产品型号		SFK-3	SFK-4
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	144	173
	b	121	144
	c	56	57
	d	50	51
	e	26.5	25
	f	60	62
	g	75	80.7
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP44



CE/IEC 国际标准插头 符合欧洲 / 国际标准 EN/IEC 60309-2



产品型号		SFK-1226
接地位置		4h
电流 (A)		63
尺寸 (mm)	a	238.9
	b	179.4
	c	66
	d	100.1
	e	75.5
	f	36.5
	g	69.5
电缆截面积 mm^2		10-16

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP44





产品型号		SFK-1227
接地位置		6h
电流 (A)		63
尺寸 (mm)	a	238.9
	b	179.4
	c	66
	d	100.1
	e	75.5
	f	36.5
	g	69.5
电缆截面积 mm^2		10-16

名称	参数
电压 (V)	220-380V~
极数	2P+E
防护等级	IP44





产品型号		SFK-1231
接地位置		6h
电流 (A)		63
尺寸 (mm)	a	238.9
	b	179.4
	c	66
	d	100.1
	e	75.5
	f	36.5
	g	69.5
电缆截面积 mm^2		10-16

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP44





产品型号		SFK-1235
接地位置		6h
电流 (A)		63
尺寸 (mm)	a	238.9
	b	179.4
	c	66
	d	100.1
	e	75.5
	f	36.5
	g	69.5
电缆截面积 mm^2		10-16

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP44







CE/IEC 国际标准插头 符合欧洲 / 国际标准 EN/IEC 60309-2



产品型号		SFK-277	SFK-289
接地位置		4h	
电流 (A)		16	32
尺寸 (mm)	a	138	170
	b	115	141
	c	24.7	32.5
	d	70.2	93.3
	e	38.3	51
	f	17.5	25
	g	47	62.2
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP67





产品型号		SFK-278	SFK-290
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	138	170
	b	115	141
	c	24.7	32.5
	d	70.2	93.3
	e	38.3	51
	f	17.5	25
	g	47	62.2
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP67





产品型号		SFK-282	SFK-294
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	144	170
	b	120.5	141
	c	25.2	32.5
	d	78	93.3
	e	43.8	51
	f	21.5	25
	g	52.2	62.2
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP67





产品型号		SFK-288	SFK-300
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	144	177
	b	120.5	148
	c	25.2	32.5
	d	87	101
	e	50.2	56.5
	f	26.5	30.3
	g	60	68.7
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP67



CE/IEC 国际标准插头 符合欧洲 / 国际标准 EN/IEC 60309-2



产品型号		SFK-1570	SFK-3399
接地位置		4h	
电流 (A)		63	125
尺寸 (mm)	a	238.9	286
	b	179.5	219
	c	51.1	57
	d	69.5	81.1
	e	113	131.5
	f	75.5	83.3
	g	36.5	42.5
电缆截面积 mm^2		10-16	25-35

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP67





产品型号		SFK-1571	SFK-3400
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	238.9	286
	b	179.5	219
	c	51.1	57
	d	69.5	81.1
	e	113	131.5
	f	75.5	83.3
	g	36.5	42.5
电缆截面积 mm^2		10-16	25-35

名称	参数
电压 (V)	220-380V~
极数	2P+E
防护等级	IP67





产品型号		SFK-1110	SFK-1443
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	238.9	286
	b	179.5	219
	c	51.1	57
	d	69.5	81.1
	e	113	131.5
	f	75.5	83.3
	g	36.5	42.5
电缆截面积 mm^2		10-16	25-35

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP67





产品型号		SFK-1114	SFK-1447
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	238.9	286
	b	179.5	219
	c	51.1	57
	d	69.5	81.1
	e	113	131.5
	f	75.5	83.3
	g	36.5	42.5
电缆截面积 mm^2		10-16	25-35

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP67







CE/IEC 国际标准明装插座 符合欧洲 / 国际标准 EN/IEC 60309-2



产品型号		SFK-100	SFK-1420
接地位置		4h	
电流 (A)		16	32
尺寸 (mm)	a	25 °	25 °
	b	127.9	156.4
	c	123.7	147.8
	d	94.6	120.7
	e	77.5	79
	f	88	98.5
	g	64.2	90.2
	m	M25	M32
	m*	1 个 M25 堵头可剪断	1 个 M32 堵头可剪断
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP44





产品型号		SFK-101	SFK-1421
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	25 °	25 °
	b	127.9	156.4
	c	123.7	147.8
	d	94.6	120.7
	e	77.5	79
	f	88	98.5
	g	64.2	90.2
	m	M25	M32
	m*	1 个 M25 堵头可剪断	1 个 M32 堵头可剪断
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP44





产品型号		SFK-105	SFK-1425
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	25 °	25 °
	b	129.9	156.4
	c	128.7	147.8
	d	94.6	120.7
	e	77.5	79
	f	88	98.5
	g	64.2	90.2
	m	M25	M32
	m*	1 个 M25 堵头可剪断	1 个 M32 堵头可剪断
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP44





产品型号		SFK-111	SFK-1557
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	25 °	25 °
	b	135.4	158
	c	128.8	157.2
	d	94.6	120.7
	e	77.5	79
	f	88	98.5
	g	64.2	90.2
	m	M25	M32
	m*	1 个 M25 堵头可剪断	1 个 M32 堵头可剪断
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP44



CE/IEC 国际标准明装插座 符合欧洲 / 国际标准 EN/IEC 60309-2



产品型号		SFK-1136
接地位置		4h
电流 (A)		63
尺寸 (mm)	a	25 °
	b	216
	c	165
	d	171
	e	108
	f	136
	g	133
	m	M40
	m*	1 个 M40 堵头可剪断
电缆截面积 mm^2		10-16

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP44





产品型号		SFK-1137
接地位置		6h
电流 (A)		63
尺寸 (mm)	a	25 °
	b	216
	c	165
	d	171
	e	108
	f	136
	g	133
	m	M40
	m*	1 个 M40 堵头可剪断
电缆截面积 mm^2		10-16

名称	参数
电压 (V)	220-380V~
极数	2P+E
防护等级	IP44





产品型号		SFK-1141
接地位置		6h
电流 (A)		63
尺寸 (mm)	a	25 °
	b	216
	c	165
	d	171
	e	108
	f	136
	g	133
	m	M40
	m*	1 个 M40 堵头可剪断
电缆截面积 mm^2		10-16

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP44





产品型号		SFK-1145
接地位置		6h
电流 (A)		63
尺寸 (mm)	a	25 °
	b	216
	c	165
	d	171
	e	108
	f	136
	g	133
	m	M40
	m*	1 个 M40 堵头可剪断
电缆截面积 mm^2		10-16

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP44







CE/IEC 国际标准明装插座 符合欧洲 / 国际标准 EN/IEC 60309-2



产品型号		SFK-1193	SFK-1201
接地位置		4h	
电流 (A)		16	32
尺寸 (mm)	a	25 °	25 °
	b	127.9	160.2
	c	123.7	142.7
	d	94.6	120.7
	e	77.5	79
	f	88	98.5
	g	64.2	90.2
	m	M25	M32
	m*	1 个 M25 堵头可剪断	1 个 M32 堵头可剪断
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP67





产品型号		SFK-1192	SFK-1202
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	25 °	25 °
	b	127.9	160.2
	c	123.7	142.7
	d	94.6	120.7
	e	77.5	79
	f	88	98.5
	g	64.2	90.2
	m	M25	M32
	m*	1 个 M25 堵头可剪断	1 个 M32 堵头可剪断
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP67





产品型号		SFK-1196	SFK-1206
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	25 °	25 °
	b	129.9	160.2
	c	128.7	142.7
	d	94.6	120.7
	e	77.5	79
	f	88	98.5
	g	64.2	90.2
	m	M25	M32
	m*	1 个 M25 堵头可剪断	1 个 M32 堵头可剪断
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP67





产品型号		SFK-1200	SFK-1210
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	25 °	25 °
	b	135.4	161.1
	c	128.8	149.9
	d	94.6	120.7
	e	77.5	79
	f	88	98.5
	g	64.2	90.2
	m	M25	M32
	m*	1 个 M25 堵头可剪断	1 个 M32 堵头可剪断
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP67



CE/IEC 国际标准明装插座 符合欧洲 / 国际标准 EN/IEC 60309-2



产品型号		SFK-856
接地位置		4h
电流 (A)		63
尺寸 (mm)	a	25 °
	b	216
	c	165
	d	171
	e	108
	f	136
	g	133
	m	M40
	m*	1 个 M40 堵头可剪断
电缆截面积 mm^2		10-16

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP44





产品型号		SFK-128	SFK-1381
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	25 °	25 °
	b	216	313
	c	169	203
	d	171	264
	e	108	140
	f	136	163
	g	133	240
	m	M40	M50
	m*	1 个 M40 堵头可剪断	1 个 M50 堵头可剪断
电缆截面积 mm^2		10-16	25-35

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	2P+E
防护等级	IP67





产品型号		SFK-132	SFK-139
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	25 °	25 °
	b	216	313
	c	169	203
	d	171	264
	e	108	140
	f	136	163
	g	133	240
	m	M40	M50
	m*	1 个 M40 堵头可剪断	1 个 M50 堵头可剪断
电缆截面积 mm^2		10-16	25-35

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP67





产品型号		SFK-136	SFK-143
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	25 °	25 °
	b	216	313
	c	169	203
	d	171	264
	e	108	140
	f	136	163
	g	133	240
	m	M40	M50
	m*	1 个 M40 堵头可剪断	1 个 M50 堵头可剪断
电缆截面积 mm^2		10-16	25-35

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP67







CE/IEC 国际标准连接器 符合欧洲 / 国际标准 EN/IEC 60309-2



产品型号		SFK-509	SFK-521
接地位置		4h	
电流 (A)		16	32
尺寸 (mm)	a	155	195.9
	b	81	102.7
	c	51.1	64.2
	d	49.5	64.2
	e	86	101.8
	f	34.7	37
	g	57	71.2
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP44





产品型号		SFK-510	SFK-522
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	155	195.9
	b	81	102.7
	c	51.1	64.2
	d	49.5	64.2
	e	86	101.8
	f	34.7	37
	g	57	71.2
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP44





产品型号		SFK-514	SFK-526
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	155	195.9
	b	81	102.7
	c	51.2	64.2
	d	55.7	64.2
	e	90.4	101.8
	f	37	37
	g	61.2	71.2
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP44





产品型号		SFK-5	SFK-6
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	160	195.9
	b	86	103.2
	c	51	62.8
	d	63	70.8
	e	97.2	104.9
	f	37	37
	g	74.5	80
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP44



CE/IEC 国际标准连接器 符合欧洲 / 国际标准 EN/IEC 60309-2



产品型号		SFK-1236
接地位置		4h
电流 (A)		63
尺寸 (mm)	a	257
	b	112.5
	c	85
	d	77.4
	e	108
	f	34
	g	92
电缆截面积 mm^2		10-16

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP44





产品型号		SFK-1237
接地位置		6h
电流 (A)		63
尺寸 (mm)	a	257
	b	112.5
	c	85
	d	77.4
	e	108
	f	34
	g	92
电缆截面积 mm^2		10-16

名称	参数
电压 (V)	220-380V~
极数	2P+E
防护等级	IP44





产品型号		SFK-1241
接地位置		6h
电流 (A)		63
尺寸 (mm)	a	257
	b	112.5
	c	85
	d	77.4
	e	108
	f	34
	g	92
电缆截面积 mm^2		10-16

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP44





产品型号		SFK-1245
接地位置		6h
电流 (A)		63
尺寸 (mm)	a	257
	b	112.5
	c	85
	d	77.4
	e	108
	f	34
	g	92
电缆截面积 mm^2		10-16

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP44







CE/IEC 国际标准连接器 符合欧洲 / 国际标准 EN/IEC 60309-2



产品型号		SFK-539	SFK-551
接地位置		4h	
电流 (A)		16	32
尺寸 (mm)	a	158.6	199.2
	b	81	102.7
	c	54.7	67.5
	d	49.5	64.2
	e	71.7	95.5
	f	79.6	98.7
	g	34.7	37
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP67





产品型号		SFK-540	SFK-552
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	158.6	199.2
	b	81	102.7
	c	54.7	67.5
	d	49.5	64.2
	e	71.7	95.5
	f	79.6	98.7
	g	34.7	37
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP67





产品型号		SFK-544	SFK-556
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	158.5	199.2
	b	80.6	102.7
	c	54.9	67.5
	d	55.7	64.2
	e	80.6	95.5
	f	85.2	98.7
	g	37	37
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP67





产品型号		SFK-550	SFK-562
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	142	200
	b	119	103.2
	c	56	67.8
	d	63	70.8
	e	89	102
	f	92.8	104.9
	g	37	37
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP67



CE/IEC 国际标准连接器 符合欧洲 / 国际标准 EN/IEC 60309-2



产品型号		SFK-1573	SFK-3389
接地位置		4h	
电流 (A)		63	125
尺寸 (mm)	a	260	300
	b	104	140
	c	95.8	100
	d	77.4	89.5
	e	112.5	123
	f	109	121
	g	34	34.5
电缆截面积 mm^2		10-16	25-35

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP67





产品型号		SFK-1574	SFK-3390
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	260	300
	b	104	140
	c	95.8	100
	d	77.4	89.5
	e	112.5	123
	f	109	121
	g	34	34.5
电缆截面积 mm^2		10-16	25-35

名称	参数
电压 (V)	220-380V~
极数	2P+E
防护等级	IP67





产品型号		SFK-1117	SFK-1450
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	260	300
	b	104	140
	c	95.8	100
	d	77.4	89.5
	e	112.5	123
	f	109	121
	g	34	34.5
电缆截面积 mm^2		10-16	25-35

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP67



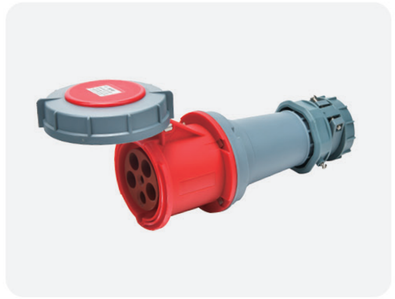

产品型号		SFK-1121	SFK-1454
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	260	300
	b	104	140
	c	95.8	100
	d	77.4	89.5
	e	112.5	123
	f	109	121
	g	34	34.5
电缆截面积 mm^2		10-16	25-35

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP67







CE/IEC 国际标准暗装直座 符合欧洲 / 国际标准 EN/IEC 60309-2



产品型号		SFK-1365	SFK-1394
接地位置		4h	
电流 (A)		16	32
尺寸 (mm)	a	75	75
	b	75	75
	c	60	60
	d	60	60
	e	5.5	5.5
	f	31.8	40.8
	g	8	8
	g1	2	2
	h	91	101.8
	i	45	58
	j	51.2	63
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP44





产品型号		SFK-1366	SFK-1395
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	75	75
	b	75	75
	c	60	60
	d	60	60
	e	5.5	5.5
	f	31.1	40.8
	g	8	8
	g1	2	2
	h	91	101.8
	i	45	58
	j	51.2	63
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP44





产品型号		SFK-1390	SFK-1399
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	75	75
	b	75	75
	c	60	60
	d	60	60
	e	5.5	5.5
	f	32.2	40.8
	g	8	8
	g1	2	2
	h	92.4	101.8
	i	55	58
	j	51.1	63
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP44





产品型号		SFK-1385	SFK-3451
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	75	75
	b	75	75
	c	60	60
	d	60	60
	e	5.5	5.5
	f	31.1	39.8
	g	8	8
	g1	2	2
	h	97.2	111.7
	i	55	62
	j	52.7	62.2
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP44



CE/IEC 国际标准暗装直座 符合欧洲 / 国际标准 EN/IEC 60309-2



产品型号		SFK-1260
接地位置		4h
电流 (A)		63
尺寸 (mm)	a	107
	b	100
	c	86
	d	78
	e	6
	f	55
	g	12
	g1	2
	h	113
	i	89
	j	80
电缆截面积 mm^2		10-16

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP44





产品型号		SFK-1261
接地位置		6h
电流 (A)		63
尺寸 (mm)	a	107
	b	100
	c	86
	d	78
	e	6
	f	55
	g	12
	g1	2
	h	113
	i	89
	j	80
电缆截面积 mm^2		10-16

名称	参数
电压 (V)	220-380V~
极数	2P+E
防护等级	IP44





产品型号		SFK-1248
接地位置		6h
电流 (A)		63
尺寸 (mm)	a	107
	b	100
	c	86
	d	78
	e	6
	f	55
	g	12
	g1	2
	h	113
	i	89
	j	80
电缆截面积 mm^2		10-16

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP44





产品型号		SFK-1252
接地位置		6h
电流 (A)		63
尺寸 (mm)	a	107
	b	100
	c	86
	d	78
	e	6
	f	55
	g	12
	g1	2
	h	113
	i	89
	j	80
电缆截面积 mm^2		10-16

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP44







CE/IEC 国际标准暗装直座 符合欧洲 / 国际标准 EN/IEC 60309-2



产品型号		SFK-217	SFK-229
接地位置		4h	
电流 (A)		16	32
尺寸 (mm)	a	75	75
	b	75	75
	c	60	60
	d	60	60
	e	5.5	5.5
	f	31.8	31.8
	g	8	8
	g1	2	2
	h	79.6	107.7
	i	45	58
	j	54.8	66.3
	k	71.7	95.5
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP67





产品型号		SFK-218	SFK-230
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	75	75
	b	75	75
	c	60	60
	d	60	60
	e	5.5	5.5
	f	31.8	40.8
	g	8	8
	g1	2	2
	h	79.6	107.7
	i	45	58
	j	54.8	66.3
	k	71.7	95.5
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP67



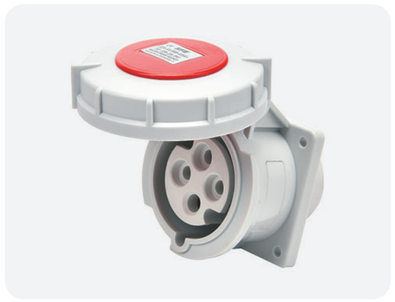

产品型号		SFK-222	SFK-234
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	75	75
	b	75	75
	c	60	60
	d	60	60
	e	5.5	5.5
	f	32.2	40.8
	g	8	8
	g1	2	2
	h	85.3	107.7
	i	52	58
	j	54.8	66.3
	k	80.6	95.5
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP67





产品型号		SFK-228	SFK-240
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	75	75
	b	75	75
	c	60	60
	d	60	60
	e	5.5	5.5
	f	32.2	39.8
	g	8	8
	g1	2	2
	h	92.9	106
	i	55	62
	j	58.5	67.9
	k	89	102
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP67



CE/IEC 国际标准暗装直座 符合欧洲 / 国际标准 EN/IEC 60309-2



产品型号		SFK-1263	SFK-3379
接地位置		4h	
电流 (A)		63	125
尺寸 (mm)	a	107	130
	b	100	130
	c	86	104
	d	78	104
	e	6.5	6.5
	f	55	43
	g	12	18
	g1	2	2
	h	113	122
	i	89	95
	j	84	124
	k	118	135
电缆截面积 mm^2		10-16	25-35

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP67





产品型号		SFK-1264	SFK-3380
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	107	130
	b	100	130
	c	86	104
	d	78	104
	e	6.5	6.5
	f	55	43
	g	12	18
	g1	2	2
	h	113	122
	i	89	95
	j	84	124
	k	118	135
电缆截面积 mm^2		10-16	25-35

名称	参数
电压 (V)	220-380V~
极数	2P+E
防护等级	IP67





产品型号		SFK-1124	SFK-1457
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	107	130
	b	100	130
	c	86	104
	d	78	104
	e	6.5	6.5
	f	55	43
	g	12	18
	g1	2	2
	h	113	122
	i	89	95
	j	84	124
	k	118	135
电缆截面积 mm^2		10-16	25-35

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP67





产品型号		SFK-1128	SFK-1461
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	107	130
	b	100	130
	c	86	104
	d	78	104
	e	6.5	6.5
	f	55	43
	g	12	18
	g1	2	2
	h	113	122
	i	89	95
	j	84	124
	k	118	135
电缆截面积 mm^2		10-16	25-35

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP67







CE/IEC 国际标准暗装斜座 符合欧洲 / 国际标准 EN/IEC 60309-2



产品型号		SFK-1462	SFK-1491
接地位置		4h	
电流 (A)		16	32
尺寸 (mm)	a1	20 °	20 °
	a	73.5	85
	b	64	85
	c	60	70
	d	52	70
	e	5.5	5.5
	f	44.9	54.3
	g	7	8
	g1	2	2
	h	86.7	98.7
	i	45.7	57.9
	j	52	68
	k	61	80
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP44





产品型号		SFK-1463	SFK-1492
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a1	20 °	20 °
	a	73.5	85
	b	64	85
	c	60	70
	d	52	70
	e	5.5	5.5
	f	44.9	54.3
	g	7	8
	g1	2	2
	h	86.7	98.7
	i	45.7	57.9
	j	52	68
	k	61	80
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP44





产品型号		SFK-1467	SFK-1496
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a1	20 °	20 °
	a	85	85
	b	85	85
	c	70	70
	d	70	70
	e	5.5	5.5
	f	40.3	54.3
	g	8	8
	g1	2	2
	h	92.4	98.7
	i	51.5	57.9
	j	58	68
	k	65	80
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP44





产品型号		SFK-1473	SFK-1500
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a1	20 °	20 °
	a	85	85
	b	85	85
	c	70	70
	d	70	70
	e	5.5	5.5
	f	41.6	55.5
	g	8	8
	g1	2	2
	h	97.2	111.2
	i	51.9	58.2
	j	67	73
	k	72	84
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP44



CE/IEC 国际标准暗装斜座 符合欧洲 / 国际标准 EN/IEC 60309-2



产品型号		SFK-1146
接地位置		4h
电流 (A)		63
尺寸 (mm)	a	20 °
	b	110
	c	106
	d	85
	e	77
	f	6.2
	g	69
	g1	12
	h	2
	i	122
	j	85
		70
		95
电缆截面积 mm^2		10-16

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP44





产品型号		SFK-1147
接地位置		6h
电流 (A)		63
尺寸 (mm)	a	20 °
	b	110
	c	106
	d	85
	e	77
	f	6.2
	g	69
	g1	12
	h	2
	i	122
	j	85
		70
		95
电缆截面积 mm^2		10-16

名称	参数
电压 (V)	220-380V~
极数	2P+E
防护等级	IP44





产品型号		SFK-1151
接地位置		6h
电流 (A)		63
尺寸 (mm)	a	20 °
	b	110
	c	106
	d	85
	e	77
	f	6.2
	g	69
	g1	12
	h	2
	i	122
	j	85
		70
		95
电缆截面积 mm^2		10-16

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP44





产品型号		SFK-1155
接地位置		6h
电流 (A)		63
尺寸 (mm)	a	20 °
	b	110
	c	106
	d	85
	e	77
	f	6.2
	g	69
	g1	12
	h	2
	i	122
	j	85
		70
		95
电缆截面积 mm^2		10-16

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP44







CE/IEC 国际标准暗装斜座 符合欧洲 / 国际标准 EN/IEC 60309-2



产品型号		SFK-1474	SFK-1501
接地位置		4h	
电流 (A)		16	32
尺寸 (mm)	a1	20 °	20 °
	a	73.5	73.5
	b	64	64
	c	60	60
	d	52	52
	e	5.5	5.5
	f	42.9	55.5
	g	7	8
	g1	2	2
	h	82.6	108.9
	i	51.7	63.2
	j	52	68
	k	61	80
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP67





产品型号		SFK-1475	SFK-1502
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a1	20 °	20 °
	a	73.5	73.5
	b	64	64
	c	60	60
	d	52	52
	e	5.5	5.5
	f	42.9	55.5
	g	7	8
	g1	2	2
	h	82.6	108.9
	i	51.7	63.2
	j	52	68
	k	61	80
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP67





产品型号		SFK-1479	SFK-1506
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a1	20 °	20 °
	a	85	85
	b	85	85
	c	70	70
	d	70	70
	e	5.5	5.5
	f	40.3	55.5
	g	8	8
	g1	2	2
	h	88.6	108.9
	i	56.2	63.2
	j	58	68
	k	65	80
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP67





产品型号		SFK-1485	SFK-1551
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a1	20 °	20 °
	a	85	85
	b	85	85
	c	70	70
	d	70	70
	e	5.5	5.5
	f	41.6	55.5
	g	8	8
	g1	2	2
	h	96	109
	i	58.6	63.2
	j	67	73
	k	72	84
电缆截面积 mm^2		1.5-2.5	4-6

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP67



CE/IEC 国际标准暗装斜座 符合欧洲 / 国际标准 EN/IEC 60309-2



产品型号		SFK-2179
接地位置		4h
电流 (A)		63
尺寸 (mm)	a	20 °
	b	110
	c	106
	d	85
	e	77
	f	6.2
	g	46
	g1	12
	h	2
	i	125
	j	85
		69
		117
电缆截面积 mm^2		10-16

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP67





产品型号		SFK-2180	SFK-3575
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a1	20 °	20 °
	a	110	114
	b	106	110
	c	85	90
	d	77	90
	e	6.2	6.2
	f	46	47
	g	12	13
	g1	2	2
	h	125	135
	i	85	85
	j	69	103
	k	117	135
电缆截面积 mm^2		10-16	25-35

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP67





产品型号		SFK-205	SFK-212
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a1	20 °	20 °
	a	110	114
	b	106	110
	c	85	90
	d	77	90
	e	6.2	6.2
	f	46	47
	g	12	13
	g1	2	2
	h	125	135
	i	85	85
	j	69	103
	k	117	135
电缆截面积 mm^2		10-16	25-35

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP67





产品型号		SFK-209	SFK-216
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a1	20 °	20 °
	a	110	114
	b	106	110
	c	85	90
	d	77	90
	e	6.2	6.2
	f	46	47
	g	12	13
	g1	2	2
	h	125	135
	i	85	85
	j	69	103
	k	117	135
电缆截面积 mm^2		10-16	25-35

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP67







新型工业用插头 New Industrial plug



产品型号		SFN-013-4	SFN-023-4
接地位置		4h	
电流 (A)		16	32
尺寸 (mm)	a	118	146
	b	82	100
	c	48	63
	d	6-15	10-20
	sw	38	50
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP44





产品型号		SFN-013	SFN-023
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	118	146
	b	82	100
	c	48	63
	d	6-15	10-20
	sw	38	50
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP44





产品型号		SFN-014	SFN-024
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	124	146
	b	88	100
	c	53	63
	d	6-15	10-20
	sw	38	50
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP44





产品型号		SFN-015	SFN-025
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	131	152
	b	95	106
	c	61	70
	d	8-16	10-20
	sw	42	50
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP44



新型工业用插头 New Industrial plug



产品型号		SFN-0132-4	SFN-0232-4
接地位置		4h	
电流 (A)		16	32
尺寸 (mm)	a	118	146
	b	82	100
	d	6-15	10-20
	sw	38	50
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP67





产品型号		SFN-0132	SFN-0232
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	118	146
	b	82	100
	d	6-15	10-20
	sw	38	50
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP67



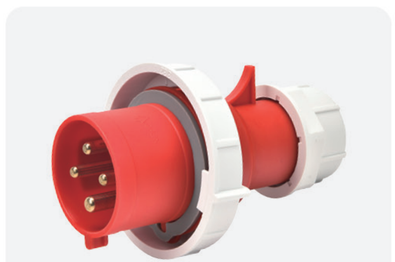

产品型号		SFN-0142	SFN-0242
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	124	146
	b	79	93
	d	6-15	10-20
	sw	38	50
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP67





产品型号		SFN-0152	SFN-0252
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	131	152
	b	87	100
	d	61	70
	sw	8-16	10-20
		42	50
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP67







新型工业用插头 New Industrial plug

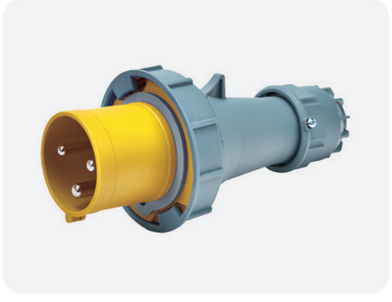

产品型号		SFN-0332-4	SFN-0432-4
接地位置		4h	
电流 (A)		63	125
尺寸 (mm)	a	240	295
	b	115	126
	c	30	44.5
电缆截面积 mm^2		6-16	16-50

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP67





产品型号		SFN-0332	SFN-0432
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	240	295
	b	115	126
	c	30	44.5
电缆截面积 mm^2		6-16	16-50

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP67



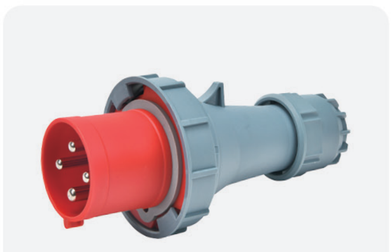

产品型号		SFN-0342	SFN-0442
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	240	295
	b	115	126
	c	30	44.5
电缆截面积 mm^2		6-16	16-50

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP67





产品型号		SFN-0352	SFN-0452
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	240	295
	b	115	126
	c	30	44.5
电缆截面积 mm^2		6-16	16-50

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP67



新型工业用明装插座 New Industrial socket



产品型号		SFN-113-4	SFN-123-4
接地位置		4h	
电流 (A)		16	32
尺寸 (mm)	a	137	153
	b	87	101
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP44





产品型号		SFN-113	SFN-123
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	137	153
	b	87	101
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP44





产品型号		SFN-114	SFN-124
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	138	153
	b	95	101
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP44





产品型号		SFN-115	SFN-125
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	139	154
	b	99	104
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP44







新型工业用明装插座 New Industrial socket



产品型号		SFN-113K-4	SFN-123K-4
接地位置		4h	
电流 (A)		16	32
尺寸 (mm)	a	151	165
	b	96	107
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP44





产品型号		SFN-113K	SFN-123K
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	151	165
	b	96	107
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP44





产品型号		SFN-114K	SFN-124K
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	153	165
	b	98	107
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP44





产品型号		SFN-115K	SFN-125K
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	155	166
	b	103	109
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP44



新型工业用明装插座 New Industrial socket



产品型号		SFN-1132-4	SFN-1232-4
接地位置		4h	
电流 (A)		16	32
尺寸 (mm)	a	151	165
	b	96	107
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP67





产品型号		SFN-1132	SFN-1232
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	151	165
	b	96	107
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP67





产品型号		SFN-1142	SFN-1242
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	153	165
	b	98	107
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP67





产品型号		SFN-1152	SFN-1252
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	155	166
	b	103	109
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP67







新型工业用明装插座 New Industrial socket



产品型号		SFN-1332-4	SFN-1432-4
接地位置		4h	
电流 (A)		63	125
尺寸 (mm)	a	175	190
	b	170	260
	c	230	330
	d	118	160
	e	136	240
	f	104	140
电缆截面积 mm^2		6-16	16-50

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP67





产品型号		SFN-1332	SFN-1432
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	175	190
	b	170	260
	c	230	330
	d	118	160
	e	136	240
	f	104	140
电缆截面积 mm^2		6-16	16-50

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP67





产品型号		SFN-1342	SFN-1442
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	175	190
	b	170	260
	c	230	330
	d	118	160
	e	136	240
	f	104	140
电缆截面积 mm^2		6-16	16-50

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP67





产品型号		SFN-1352	SFN-1452
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	175	190
	b	170	260
	c	230	330
	d	118	160
	e	136	240
	f	104	140
电缆截面积 mm^2		6-16	16-50

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP67



新型工业用连接器 New Industrial connector



产品型号		SFN-213-4	SFN-223-4
接地位置		4h	
电流 (A)		16	32
尺寸 (mm)	a	129	159
	b	76	92
	c	6-15	10-20
	sw	38	50
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP44





产品型号		SFN-213	SFN-223
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	129	159
	b	76	92
	c	6-15	10-20
	sw	38	50
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	220-380V~
极数	2P+E
防护等级	IP44





产品型号		SFN-214	SFN-224
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	135	159
	b	80	92
	c	6-15	10-20
	sw	38	50
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP44





产品型号		SFN-215	SFN-225
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	142	165
	b	89	98
	c	8-16	10-20
	sw	42	50
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP44







新型工业用连接器 New Industrial connector



产品型号		SFN-2132-4	SFN-2232-4
接地位置		4h	
电流 (A)		16	32
尺寸 (mm)	a	133	162
	b	78	96
	d	6-15	10-20
	sw	38	50
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP67





产品型号		SFN-2132	SFN-2232
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	133	162
	b	78	96
	d	6-15	10-20
	sw	38	50
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP67





产品型号		SFN-2142	SFN-2242
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	139	162
	b	84	96
	d	6-15	10-20
	sw	38	50
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP67





产品型号		SFN-2152	SFN-2252
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	145	168
	b	92	102
	d	8-16	12-22
	sw	42	50
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP67



新型工业用连接器 New Industrial connector

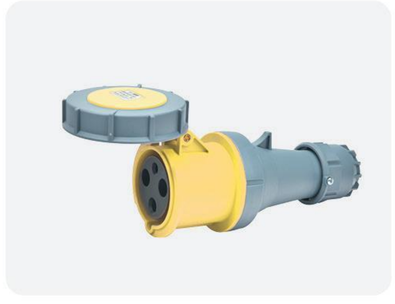

产品型号		SFN-2332-4	SFN-2432-4
接地位置		4h	
电流 (A)		63	125
尺寸 (mm)	a	261	305
	b	114	115
	c	30	44.5
	d	112	130
电缆截面积 mm^2		6-16	16-50

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP67





产品型号		SFN-2332	SFN-2432
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	261	305
	b	114	115
	c	30	44.5
	d	112	130
电缆截面积 mm^2		6-16	16-50

名称	参数
电压 (V)	220-380V~
极数	2P+E
防护等级	IP67





产品型号		SFN-2342	SFN-2442
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	261	305
	b	114	115
	c	30	44.5
	d	112	130
电缆截面积 mm^2		6-16	16-50

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP67





产品型号		SFN-2352	SFN-2452
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	261	305
	b	114	115
	c	30	44.5
	d	112	130
电缆截面积 mm^2		6-16	16-50

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP67







新型工业用暗装插座 New Industrial socket



产品型号		SFN-313-4	SFN-323-4
接地位置		4h	
电流 (A)		16	32
尺寸 (mm)	axb	75	65
	cxd	61	61
	e	22	24
	f	60	70
	g	5	5
	h	50	55
	i	87	95
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP44





产品型号		SFN-313	SFN-323
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	axb	75	75
	cxd	61	61
	e	22	24
	f	60	70
	g	5	5
	h	50	55
	i	87	95
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP44





产品型号		SFN-314	SFN-324
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	axb	75	75
	cxd	61	61
	e	17	24
	f	59	69
	g	5	5
	h	50	55
	i	88	95
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP44





产品型号		SFN-315	SFN-325
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	axb	75	75
	cxd	61	61
	e	17	22
	f	59	71
	g	5	5
	h	55	60
	i	92	100
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP44



新型工业用暗装插座 New Industrial socket



产品型号		SFN-3132-4	SFN-3232-4
接地位置		4h	
电流 (A)		16	32
尺寸 (mm)	a	75	75
	b	75	75
	c	61	61
	d	61	61
	e	18	24
	f	63	70
	g	50	55
	h	50	55
	i	5	5
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP67





产品型号		SFN-3132	SFN-3232
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	75	75
	b	75	75
	c	61	61
	d	61	61
	e	18	24
	f	63	70
	g	50	55
	h	50	55
	i	5	5
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP67





产品型号		SFN-3142	SFN-3242
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	75	75
	b	75	75
	c	61	61
	d	61	61
	e	18	24
	f	63	73
	g	50	55
	h	50	55
	i	5	5
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP67





产品型号		SFN-3152	SFN-3252
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	75	75
	b	75	75
	c	61	61
	d	61	61
	e	18	24
	f	63	76
	g	55	60
	h	55	60
	i	5	5
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP67







新型工业用暗装插座 New Industrial socket



产品型号		SFN-3332-4	SFN-3432-4
接地位置		4h	
电流 (A)		63	125
尺寸 (mm)	a	100	120
	b	100	120
	c	81	102
	d	81	102
	e	35	44
	f	96	106
	g	80	100
	h	80	100
	i	7	7
电缆截面积 mm^2		6-16	16-50

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP67





产品型号		SFN-3332	SFN-3432
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	100	120
	b	100	120
	c	81	102
	d	81	102
	e	35	44
	f	96	106
	g	80	100
	h	80	100
	i	7	7
电缆截面积 mm^2		6-16	16-50

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP67





产品型号		SFN-3342	SFN-3442
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	100	120
	b	100	120
	c	81	102
	d	81	102
	e	35	44
	f	96	106
	g	80	100
	h	80	100
	i	7	7
电缆截面积 mm^2		6-16	16-50

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP67





产品型号		SFN-3352	SFN-3452
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	100	120
	b	100	120
	c	81	102
	d	81	102
	e	35	44
	f	96	106
	g	80	100
	h	80	100
	i	7	7
电缆截面积 mm^2		6-16	16-50

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP67



新型工业用暗装插座 New Industrial socket



产品型号		SFN-413-4	SFN-423-4
接地位置		4h	
电流 (A)		16	32
尺寸 (mm)	a	85	85
	b	85	85
	c	70	70
	d	70	70
	e	34	50
	f	60	60
	g	60	76
	h	60	78
	i	5	5
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP44





产品型号		SFN-413	SFN-423
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	85	85
	b	85	85
	c	70	70
	d	70	70
	e	34	50
	f	60	60
	g	60	76
	h	60	78
	i	5	5
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	220-380V~
极数	2P+E
防护等级	IP44





产品型号		SFN-414	SFN-424
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	85	85
	b	85	85
	c	70	70
	d	70	70
	e	34	50
	f	58	60
	g	65	76
	h	65	78
	i	5	5
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP44





产品型号		SFN-415	SFN-425
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	85	85
	b	85	85
	c	70	70
	d	70	70
	e	34	50
	f	52	62
	g	70	76
	h	70	79
	i	5	5
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP44







新型工业用暗装插座 New Industrial socket



产品型号		SFN-4132-4	SFN-4232-4
接地位置		4h	
电流 (A)		16	32
尺寸 (mm)	a	85	85
	b	85	85
	c	70	70
	d	70	70
	e	33	50
	f	60	60
	g	60	76
	h	60	78
	i	5	5
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP67





产品型号		SFN-4132	SFN-4232
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	85	85
	b	85	85
	c	70	70
	d	70	70
	e	33	50
	f	60	60
	g	60	76
	h	60	78
	i	5	5
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP67





产品型号		SFN-4142	SFN-4242
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	85	85
	b	85	85
	c	70	70
	d	70	70
	e	33	50
	f	60	60
	g	65	76
	h	65	78
	i	5	5
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP67





产品型号		SFN-4152	SFN-4252
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	85	85
	b	85	85
	c	70	70
	d	70	70
	e	33	50
	f	52	62
	g	70	76
	h	70	79
	i	5	5
	j	-	36
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP67



新型工业用暗装插座 New Industrial socket



产品型号		SFN-4332-4	SFN-4432-4
接地位置		4h	
电流 (A)		63	125
尺寸 (mm)	a	101	120
	b	113	131
	c	81	102
	d	90	108
	e	64	87
	f	83	82
	g	88	105
	h	88	105
	i	7	7.5
电缆截面积 mm^2		6-25	16-50

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP67





产品型号		SFN-4332	SFN-4432
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	101	120
	b	113	131
	c	81	102
	d	90	108
	e	64	87
	f	83	82
	g	88	105
	h	88	105
	i	7	7.5
电缆截面积 mm^2		6-25	16-50

名称	参数
电压 (V)	220-380V~
极数	2P+E
防护等级	IP67





产品型号		SFN-4342	SFN-4442
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	101	120
	b	113	131
	c	81	102
	d	90	108
	e	64	87
	f	83	82
	g	88	105
	h	88	105
	i	7	7.5
电缆截面积 mm^2		6-25	16-50

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP67





产品型号		SFN-4352	SFN-4452
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	101	120
	b	113	131
	c	81	102
	d	90	108
	e	64	87
	f	83	82
	g	88	105
	h	88	105
	i	7	7.5
电缆截面积 mm^2		6-25	16-50

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP67







新型器具插座 New Industrial socket



产品型号		SFN-513-4	SFN-523-4
接地位置		4h	
电流 (A)		16	32
尺寸 (mm)	a	160	175
	b	81	81
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP44





产品型号		SFN-513	SFN-523
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	160	175
	b	81	81
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP44





产品型号		SFN-514	SFN-524
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	165	175
	b	81	81
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP44





产品型号		SFN-515	SFN-525
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	165	175
	b	81	81
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP44



新型器具插座 New Industrial socket



产品型号		SFN-5132-4	SFN-5232-4
接地位置		4h	
电流 (A)		16	32
尺寸 (mm)	a	160	175
	b	81	81
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP67





产品型号		SFN-5132	SFN-5232
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	160	175
	b	81	81
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP67





产品型号		SFN-5142	SFN-5242
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	165	175
	b	81	81
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP67





产品型号		SFN-5152	SFN-5252
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	165	175
	b	81	81
电缆截面积 mm^2		1.5-2.5	2.5-6

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP67







新型器具插座 New Industrial socket



产品型号		SFN-5332-4	SFN-5423-4
接地位置		4h	
电流 (A)		63	125
尺寸 (mm)	a	193	223
	b	123	145
	c	153	185
	d	111	123
	e	21	17
	f	6	8
	g	288	317
	h	127	140
	PG	29	36
电缆截面积 mm^2		6-16	16-50

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP67





产品型号		SFN-5332	SFN-5432
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	193	223
	b	123	145
	c	153	185
	d	111	123
	e	21	17
	f	6	8
	g	288	317
	h	127	140
	PG	29	36
电缆截面积 mm^2		6-16	16-50

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP67





产品型号		SFN-5342	SFN-5442
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	193	223
	b	123	145
	c	153	185
	d	111	123
	e	21	17
	f	6	8
	g	288	317
	h	127	140
	PG	29	36
电缆截面积 mm^2		6-16	16-50

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP67





产品型号		SFN-5325	SFN-5452
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	193	223
	b	123	145
	c	153	185
	d	111	123
	e	21	17
	f	6	8
	g	288	317
	h	127	140
	PG	29	36
电缆截面积 mm^2		6-16	16-50

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP67



新型器具插座 New Industrial socket



产品型号		SFN-613-4	SFN-623-4
接地位置		4h	
电流 (A)		16	32
尺寸 (mm)	a	75	75
	b	75	75
	c	61	61
	d	61	61
	e	25	30
	f	41	50
	g	5	5
	h	43	55
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP44





产品型号		SFN-613	SFN-623
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	75	75
	b	75	75
	c	61	61
	d	61	61
	e	25	30
	f	41	50
	g	5	5
	h	43	55
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP44





产品型号		SFN-614	SFN-624
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	75	75
	b	75	75
	c	61	61
	d	61	61
	e	25	30
	f	41	50
	g	5	5
	h	43	55
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP44





产品型号		SFN-615	SFN-625
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	75	75
	b	75	75
	c	61	61
	d	61	61
	e	26	30
	f	42	50
	g	5	5
	h	43	55
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP44







新型器具插座 New Industrial socket



产品型号		SFN-6132-4	SFN-6232-4
接地位置		4h	
电流 (A)		16	32
尺寸 (mm)	a	75	75
	b	61	61
	d	64	73
	e	74	98
	f	40	54
	g	5.5	5.5
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP67





产品型号		SFN-6132	SFN-6232
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	75	75
	b	61	61
	d	64	73
	e	74	98
	f	40	54
	g	5.5	5.5
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP67





产品型号		SFN-6142	SFN-6242
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	75	75
	b	61	61
	d	65	73
	e	83	98
	f	48	54
	g	5.5	5.5
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP67





产品型号		SFN-6152	SFN-6252
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	75	75
	b	61	61
	d	65	73
	e	90	103
	f	53	61
	g	5.5	5.5
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP67



新型器具插座 New Industrial socket



产品型号		SFN-6332-4	SFN-6432-4
接地位置		4h	
电流 (A)		63	125
尺寸 (mm)	a	100	120
	b	100	120
	c	80	101
	d	80	101
	e	13	22
	f	99	110
	g	73	84
	h	73	84
	i	6	6
电缆截面积 mm^2		6-16	15-50

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP67





产品型号		SFN-6332	SFN-6432
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	100	120
	b	100	120
	c	80	101
	d	80	101
	e	13	22
	f	99	110
	g	73	84
	h	73	84
	i	6	6
电缆截面积 mm^2		6-16	15-50

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP67



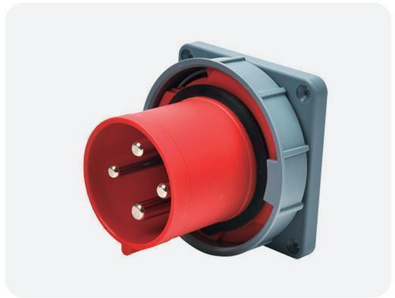

产品型号		SFN-6342	SFN-6442
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	100	120
	b	100	120
	c	80	101
	d	80	101
	e	13	22
	f	99	110
	g	73	84
	h	73	84
	i	6	6
电缆截面积 mm^2		6-16	15-50

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP67





产品型号		SFN-6352	SFN-6452
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	100	120
	b	100	120
	c	80	101
	d	80	101
	e	13	22
	f	99	110
	g	73	84
	h	73	84
	i	6	6
电缆截面积 mm^2		6-16	15-50

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP67







工业用插头 Industrial plug



产品型号		SF-013-4	SF-023-4
接地位置		4h	
电流 (A)		16	32
尺寸 (mm)	a	122	139
	b	59	75
	c	51	64
	Φ	6	8
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP44





产品型号		SF-013	SF-023
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	122	139
	b	59	75
	c	51	64
	Φ	6	8
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP44





产品型号		SF-014	SF-024
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	122	139
	b	65	75
	c	55	64
	Φ	6	8
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP44





产品型号		SF-015	SF-025
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	130	143
	b	72	75
	c	64	64
	Φ	8	8
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP44



工业用插头 Industrial plug



产品型号		SF-033-4	SF-043-4
接地位置		4h	
电流 (A)		63	125
尺寸 (mm)	a	231.5	293
	b	110	125
	c	16-38	30-50
	d	110	125
电缆截面积 mm^2		6-16	16-50

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP67





产品型号		SF-033	SF-043
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	231.5	293
	b	110	125
	c	16-38	30-50
	d	110	125
电缆截面积 mm^2		6-16	16-50

名称	参数
电压 (V)	220-380V~
极数	2P+E
防护等级	IP67





产品型号		SF-034	SF-044
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	231.5	293
	b	110	125
	c	16-38	30-50
	d	110	125
电缆截面积 mm^2		6-16	16-50

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP67





产品型号		SF-035	SF-045
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	231.5	293
	b	110	125
	c	16-38	30-50
	d	110	125
电缆截面积 mm^2		6-16	16-50

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP67







电缆保护插头 Cable sheath plug



产品型号		SF-013L-4	SF-023L-4
接地位置		4h	
电流 (A)		16	32
尺寸 (mm)	a	141	178
	b	59	75
	c	51	64
	Φ	8	10
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP44





产品型号		SF-013L	SF-023L
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	141	178
	b	59	75
	c	51	64
	Φ	8	10
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP44





产品型号		SF-014L	SF-024L
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	141	178
	b	65	75
	c	55	64
	Φ	8	10
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP44





产品型号		SF-015L	SF-025L
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	169	181
	b	72	84
	c	64	70
	Φ	10	10
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP44



工业用明装插座 Industrial socket



产品型号		SF-113-4	SF-123-4
接地位置		4h	
电流 (A)		16	32
尺寸 (mm)	a	135	153
	b	92	102
	c	71	71
	d	50	65
	e	57	57
	f	20	20
	g	32.5	32.5
	h	6.5	6.5
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP44





产品型号		SF-113	SF-123
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	135	153
	b	92	102
	c	71	71
	d	50	65
	e	57	57
	f	20	20
	g	32.5	32.5
	h	6.5	6.5
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	220-380V~
极数	2P+E
防护等级	IP44





产品型号		SF-114	SF-124
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	140	152
	b	95	104
	c	71	71
	d	56	64.5
	e	57	57
	f	20	20
	g	32.5	32.5
	h	6.5	6.5
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP44





产品型号		SF-115	SF-125
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	139	153
	b	100	107
	c	71	71
	d	63	70
	e	57	57
	f	20	20
	g	32.5	32.5
	h	6.5	6.5
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP44







电缆保护套插座 Cable sheath socket



产品型号		SF-133-4	SF-143-4
接地位置		4h	
电流 (A)		63	125
尺寸 (mm)	a	134	154
	b	311	338
	c	108	122
	d	111	130
	e	20	20
	f	153	185
	g	6	6.2
电缆截面积 mm^2		6-25	25-70

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP67





产品型号		SF-133	SF-143
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	134	154
	b	311	338
	c	108	122
	d	111	130
	e	20	20
	f	153	185
	g	6	6.2
电缆截面积 mm^2		6-25	25-70

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP67





产品型号		SF-134	SF-144
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	134	154
	b	311	338
	c	108	122
	d	111	130
	e	20	20
	f	153	185
	g	6	6.2
电缆截面积 mm^2		6-25	25-70

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP67





产品型号		SF-135	SF-145
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	134	154
	b	311	338
	c	108	122
	d	111	130
	e	20	20
	f	153	185
	g	6	6.2
电缆截面积 mm^2		6-25	25-70

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP67



电缆保护套插座 Cable sheath socket



产品型号		SF-113L-4	SF-123L-4
接地位置		4h	
电流 (A)		16	32
尺寸 (mm)	a	168	190
	b	92	102
	c	71	71
	d	50	65
	e	57	57
	f	20	20
	g	32.5	32.5
	h	6.5	6.5
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP44





产品型号		SF-113L	SF-123L
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	168	190
	b	92	102
	c	71	71
	d	50	65
	e	57	57
	f	20	20
	g	32.5	32.5
	h	6.5	6.5
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	220-380V~
极数	2P+E
防护等级	IP44





产品型号		SF-114L	SF-124L
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	166	190
	b	100	104
	c	71	71
	d	63	64.5
	e	57	57
	f	20	20
	g	32.5	32.5
	h	6.5	6.5
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP44





产品型号		SF-115L	SF-125L
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	170	190
	b	95	107
	c	71	71
	d	56	70.5
	e	57	57
	f	20	20
	g	32.5	32.5
	h	6.5	6.5
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP44







工业用连接器 Industrial connector



产品型号		SF-213-4	SF-223-4
接地位置		4h	
电流 (A)		16	32
尺寸 (mm)	a	131	150
	b	68	92
	c	50	65
	Φ	6	8
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP44





产品型号		SF-213	SF-223
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	131	150
	b	68	92
	c	50	65
	Φ	6	8
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP44





产品型号		SF-214	SF-224
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	131	150
	b	79	92
	c	56	65
	Φ	6	8
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP44





产品型号		SF-215	SF-225
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	139	154
	b	90	100
	c	63	70.5
	Φ	8	8
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP44



工业用连接器 Industrial connector



产品型号		SF-233-4	SF-243-4
接地位置		4h	
电流 (A)		63	125
尺寸 (mm)	a	240	303
	b	115	128
	c	16-38	30-50
	d	108	120
电缆截面积 mm^2		6-16	16-50

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP67





产品型号		SF-233	SF-244
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	240	303
	b	115	128
	c	16-38	30-50
	d	108	120
电缆截面积 mm^2		6-16	16-50

名称	参数
电压 (V)	220-380V~
极数	2P+E
防护等级	IP67





产品型号		SF-234	SF-244
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	240	303
	b	115	128
	c	16-38	30-50
	d	108	120
电缆截面积 mm^2		6-16	16-50

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP67





产品型号		SF-235	SF-245
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	240	303
	b	115	128
	c	16-38	30-50
	d	108	120
电缆截面积 mm^2		6-16	16-50

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP67







电缆保护连接器 Cable sheath connector



产品型号		SF-213L-4	SF-223L-4
接地位置		4h	
电流 (A)		16	32
尺寸 (mm)	a	150	189
	b	68	92
	c	50	65
	d	8	10
电缆截面积 mm^2		6-16	16-50

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP44





产品型号		SF-213L	SF-223L
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	150	189
	b	68	92
	c	50	65
	d	8	10
电缆截面积 mm^2		6-16	16-50

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP44





产品型号		SF-214L	SF-224L
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	153	189
	b	79	92
	c	56	65
	d	8	10
电缆截面积 mm^2		6-16	16-50

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP44





产品型号		SF-215L	SF-225L
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	179	195
	b	90	100
	c	63	70.5
	d	10	10
电缆截面积 mm^2		6-16	16-50

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP44



工业用暗装插座 Hide direct socket



产品型号		SF-313-4	SF-323-4
接地位置		4h	
电流 (A)		16	32
尺寸 (mm)	a	74	91
	b	70	88
	c	70	70
	d	70	70
	e	55	55
	f	56	56
	g	56	56
	h	24	29
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP44





产品型号		SF-313	SF-323
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	74	91
	b	70	88
	c	70	70
	d	70	70
	e	55	55
	f	56	56
	g	56	56
	h	24	29
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP44





产品型号		SF-314	SF-324
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	73	90
	b	80	87
	c	70	70
	d	70	70
	e	55	55
	f	56	56
	g	56	56
	h	24	30
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP44





产品型号		SF-315	SF-325
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	73	93
	b	86	95
	c	70	70
	d	70	70
	e	55	55
	f	56	56
	g	56	56
	h	26	28
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP44







工业用暗装插座 Hide direct socket



产品型号		SF-333-4	SF-343-4
接地位置		4h	
电流 (A)		63	125
尺寸 (mm)	a	100	120
	b	100	120
	c	80	101
	d	80	101
	e	54.5	68
	f	88	96
	g	114	129
	h	108	122
	i	75	90
电缆截面积 mm^2		6-25	25-70

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP67





产品型号		SF-333	SF-343
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	100	120
	b	100	120
	c	80	101
	d	80	101
	e	54.5	68
	f	88	96
	g	114	129
	h	108	122
	i	75	90
电缆截面积 mm^2		6-25	25-70

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP67





产品型号		SF-334	SF-344
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	100	120
	b	100	120
	c	80	101
	d	80	101
	e	54.5	68
	f	88	96
	g	114	129
	h	108	122
	i	75	90
电缆截面积 mm^2		6-25	25-70

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP67





产品型号		SF-335	SF-345
接地位置		6h	
电流 (A)		63	125
尺寸 (mm)	a	100	120
	b	100	120
	c	80	101
	d	80	101
	e	54.5	68
	f	88	96
	g	114	129
	h	108	122
	i	75	90
电缆截面积 mm^2		6-25	25-70

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP67



工业用暗装斜座 Hide inclined socket



产品型号		SF-413-4	SF-423-4
接地位置		4h	
电流 (A)		16	32
尺寸 (mm)	a	73	87
	b	70	91
	c	62	80
	d	54	73
	e	49	71
	f	33	42
	g	47	61
	i	36	44
	j	5	5
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP44





产品型号		SF-413	SF-423
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	73	87
	b	70	91
	c	62	80
	d	54	73
	e	49	71
	f	33	42
	g	47	61
	i	36	44
	j	5	5
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP44





产品型号		SF-414	SF-424
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	80	87
	b	78	91
	c	76	80
	d	61	73
	e	62	71
	f	42	42
	g	60	61
	i	44	44
	j	5	5
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP44





产品型号		SF-415	SF-425
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	79	87
	b	86	94
	c	75	82
	d	68	72
	e	62	71
	f	37	43
	g	60	61
	h	68	80
	i	42	44
	j	5	5
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP44







器具插座 Implement socket



产品型号		SF-513-4	SF-523-4
接地位置		4h	
电流 (A)		16	32
尺寸 (mm)	a	134	148
	b	80	88
	c	71	71
	d	43.5	57.5
	e	57	57
	f	20	20
	g	32.5	32.5
	h	6.5	6.5
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP44





产品型号		SF-513	SF-523
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	134	148
	b	80	88
	c	71	71
	d	43.5	57.5
	e	57	57
	f	20	20
	g	32.5	32.5
	h	6.5	6.5
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP44





产品型号		SF-514	SF-524
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	139	148.5
	b	80	88
	c	71	71
	d	50	57
	e	57	57
	f	20	20
	g	32.5	32.5
	h	6.5	6.5
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP44





产品型号		SF-515	SF-525
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	138.5	150.5
	b	83	90
	c	71	71
	d	55	64
	e	57	57
	f	20	20
	g	32.5	33.5
	h	6.5	6.5
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP44



暗装器具插头 Implement plug



产品型号		SF-613-4	SF-623-4
接地位置		4h	
电流 (A)		16	32
尺寸 (mm)	a	56	56
	b	56	56
	c	70.5	70.5
	d	70.5	70.5
	e	45	57
	f	23	28
	g	42	51
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	110-130V~
极数	2P+E
防护等级	IP44





产品型号		SF-613	SF-623
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	56	56
	b	56	56
	c	70.5	70.5
	d	70.5	70.5
	e	45	57
	f	23	28
	g	42	51
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	220-380V~
极数	2P+E
防护等级	IP44





产品型号		SF-614	SF-624
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	56	56
	b	56	56
	c	70.5	70.5
	d	70.5	70.5
	e	42	57
	f	23	28
	g	42	51
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP44





产品型号		SF-615	SF-625
接地位置		6h	
电流 (A)		16	32
尺寸 (mm)	a	56	56
	b	56	56
	c	70.5	70.5
	d	70.5	70.5
	e	57	63
	f	23	28
	g	42	51
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP44







SF400A 公针插头



SF400A-GT-L1

外壳	PA6，UL94 V-0
绝缘体	PA6，UL94 V-0
接触件	铜镀银
接线方式	螺丝压接：50mm²，70mm²，95mm²，120mm²，150mm² 冷压接：185mm²，240mm²
接插次数	500
温度范围	-25℃ ~+85℃
耐压 (AC.V)	4500
额定电流 (A)	400

绝缘电阻 (MΩ)	≥ 500MSΩ
工作电压 (AC.V)	1000
线规 (mm²)	50、70、95、120、150、185、240





SF400A-GT-L2

外壳	PA6，UL94 V-0
绝缘体	PA6，UL94 V-0
接触件	铜镀银
接线方式	螺丝压接：50mm²，70mm²，95mm²，120mm²，150mm² 冷压接：185mm²，240mm²
接插次数	500
温度范围	-25℃ ~+85℃
耐压 (AC.V)	4500
额定电流 (A)	400

绝缘电阻 (MΩ)	≥ 500MSΩ
工作电压 (AC.V)	1000
线规 (mm²)	50、70、95、120、150、185、240



SF400A-GT-L3

外壳	PA6，UL94 V-0
绝缘体	PA6，UL94 V-0
接触件	铜镀银
接线方式	螺丝压接：50mm²，70mm²，95mm²，120mm²，150mm² 冷压接：185mm²，240mm²
接插次数	500
温度范围	-25℃ ~+85℃
耐压 (AC.V)	4500
额定电流 (A)	400

绝缘电阻 (MΩ)	≥ 500MSΩ
工作电压 (AC.V)	1000
线规 (mm²)	50、70、95、120、150、185、240





SF400A-GT-N

外壳	PA6，UL94 V-0
绝缘体	PA6，UL94 V-0
接触件	铜镀银
接线方式	螺丝压接：50mm²，70mm²，95mm²，120mm²，150mm² 冷压接：185mm²，240mm²
接插次数	500
温度范围	-25℃ ~+85℃
耐压 (AC.V)	4500
额定电流 (A)	400

绝缘电阻 (MΩ)	≥ 500MSΩ
工作电压 (AC.V)	1000
线规 (mm²)	50、70、95、120、150、185、240





SF400A-GT-PE

外壳	PA6，UL94 V-0
绝缘体	PA6，UL94 V-0
接触件	铜镀银
接线方式	螺丝压接：50mm²，70mm²，95mm²，120mm²，150mm² 冷压接：185mm²，240mm²
接插次数	500
温度范围	-25℃ ~+85℃
耐压 (AC.V)	4500
额定电流 (A)	400

绝缘电阻 (MΩ)	≥ 500MSΩ
工作电压 (AC.V)	1000
线规 (mm²)	50、70、95、120、150、185、240



SF400A 母针插头



SF400A-MT-L1

外壳	PA6，UL94 V-0
绝缘体	PA6，UL94 V-0
接触件	铜镀银
接线方式	螺丝压接：50mm²，70mm²，95mm²，120mm²，150mm² 冷压接：185mm²，240mm²
接插次数	500
温度范围	-25℃ ~+85℃
耐压 (AC.V)	4500
额定电流 (A)	400

绝缘电阻 (MΩ)	≥ 500MSΩ
工作电压 (AC.V)	1000
线规 (mm²)	50、70、95、120、150、185、240





SF400A-MT-L2

外壳	PA6，UL94 V-0
绝缘体	PA6，UL94 V-0
接触件	铜镀银
接线方式	螺丝压接：50mm²，70mm²，95mm²，120mm²，150mm² 冷压接：185mm²，240mm²
接插次数	500
温度范围	-25℃ ~+85℃
耐压 (AC.V)	4500
额定电流 (A)	400

绝缘电阻 (MΩ)	≥ 500MSΩ
工作电压 (AC.V)	1000
线规 (mm²)	50、70、95、120、150、185、240



SF400A-MT-L3

外壳	PA6，UL94 V-0
绝缘体	PA6，UL94 V-0
接触件	铜镀银
接线方式	螺丝压接：50mm²，70mm²，95mm²，120mm²，150mm² 冷压接：185mm²，240mm²
接插次数	500
温度范围	-25℃ ~+85℃
耐压 (AC.V)	4500
额定电流 (A)	400

绝缘电阻 (MΩ)	≥ 500MSΩ
工作电压 (AC.V)	1000
线规 (mm²)	50、70、95、120、150、185、240





SF400A-MT-N

外壳	PA6，UL94 V-0
绝缘体	PA6，UL94 V-0
接触件	铜镀银
接线方式	螺丝压接：50mm²，70mm²，95mm²，120mm²，150mm² 冷压接：185mm²，240mm²
接插次数	500
温度范围	-25℃ ~+85℃
耐压 (AC.V)	4500
额定电流 (A)	400

绝缘电阻 (MΩ)	≥ 500MSΩ
工作电压 (AC.V)	1000
线规 (mm²)	50、70、95、120、150、185、240





SF400A-MT-PE

外壳	PA6，UL94 V-0
绝缘体	PA6，UL94 V-0
接触件	铜镀银
接线方式	螺丝压接：50mm²，70mm²，95mm²，120mm²，150mm² 冷压接：185mm²，240mm²
接插次数	500
温度范围	-25℃ ~+85℃
耐压 (AC.V)	4500
额定电流 (A)	400

绝缘电阻 (MΩ)	≥ 500MSΩ
工作电压 (AC.V)	1000
线规 (mm²)	50、70、95、120、150、185、240







SF400A 公针插头



SF400A-GZ-L1

外壳	PA6，UL94 V-0
绝缘体	PA6，UL94 V-0
接触件	铜镀银
接线方式	螺丝压接：50mm², 70mm², 95mm², 120mm², 150mm² 冷压接：185mm², 240mm²
接插次数	500
温度范围	-25℃ ~+85℃
耐压 (AC.V)	4500
额定电流 (A)	400

绝缘电阻 (MΩ)	≥ 500MSΩ
工作电压 (AC.V)	1000
线规 (mm²)	50、70、95、120、150、185、240





SF400A-GZ-L2

外壳	PA6，UL94 V-0
绝缘体	PA6，UL94 V-0
接触件	铜镀银
接线方式	螺丝压接：50mm², 70mm², 95mm², 120mm², 150mm² 冷压接：185mm², 240mm²
接插次数	500
温度范围	-25℃ ~+85℃
耐压 (AC.V)	4500
额定电流 (A)	400

绝缘电阻 (MΩ)	≥ 500MSΩ
工作电压 (AC.V)	1000
线规 (mm²)	50、70、95、120、150、185、240





SF400A-GZ-L3

外壳	PA6，UL94 V-0
绝缘体	PA6，UL94 V-0
接触件	铜镀银
接线方式	螺丝压接：50mm², 70mm², 95mm², 120mm², 150mm² 冷压接：185mm², 240mm²
接插次数	500
温度范围	-25℃ ~+85℃
耐压 (AC.V)	4500
额定电流 (A)	400

绝缘电阻 (MΩ)	≥ 500MSΩ
工作电压 (AC.V)	1000
线规 (mm²)	50、70、95、120、150、185、240





SF400A-GZ-N

外壳	PA6，UL94 V-0
绝缘体	PA6，UL94 V-0
接触件	铜镀银
接线方式	螺丝压接：50mm², 70mm², 95mm², 120mm², 150mm² 冷压接：185mm², 240mm²
接插次数	500
温度范围	-25℃ ~+85℃
耐压 (AC.V)	4500
额定电流 (A)	400

绝缘电阻 (MΩ)	≥ 500MSΩ
工作电压 (AC.V)	1000
线规 (mm²)	50、70、95、120、150、185、240





SF400A-GZ-PE

外壳	PA6，UL94 V-0
绝缘体	PA6，UL94 V-0
接触件	铜镀银
接线方式	螺丝压接：50mm², 70mm², 95mm², 120mm², 150mm² 冷压接：185mm², 240mm²
接插次数	500
温度范围	-25℃ ~+85℃
耐压 (AC.V)	4500
额定电流 (A)	400

绝缘电阻 (MΩ)	≥ 500MSΩ
工作电压 (AC.V)	1000
线规 (mm²)	50、70、95、120、150、185、240



SF400A 母针插头



SF400A-MZ-L1

外壳	PA6，UL94 V-0
绝缘体	PA6，UL94 V-0
接触件	铜镀银
接线方式	螺丝压接：50mm², 70mm², 95mm², 120mm², 150mm² 冷压接：185mm², 240mm²
接插次数	500
温度范围	-25℃ ~+85℃
耐压 (AC.V)	4500
额定电流 (A)	400

绝缘电阻 (MΩ)	≥ 500MSΩ
工作电压 (AC.V)	1000
线规 (mm²)	50、70、95、120、150、185、240





SF400A-MZ-L2

外壳	PA6，UL94 V-0
绝缘体	PA6，UL94 V-0
接触件	铜镀银
接线方式	螺丝压接：50mm², 70mm², 95mm², 120mm², 150mm² 冷压接：185mm², 240mm²
接插次数	500
温度范围	-25℃ ~+85℃
耐压 (AC.V)	4500
额定电流 (A)	400

绝缘电阻 (MΩ)	≥ 500MSΩ
工作电压 (AC.V)	1000
线规 (mm²)	50、70、95、120、150、185、240





SF400A-MZ-L3

外壳	PA6，UL94 V-0
绝缘体	PA6，UL94 V-0
接触件	铜镀银
接线方式	螺丝压接：50mm², 70mm², 95mm², 120mm², 150mm² 冷压接：185mm², 240mm²
接插次数	500
温度范围	-25℃ ~+85℃
耐压 (AC.V)	4500
额定电流 (A)	400

绝缘电阻 (MΩ)	≥ 500MSΩ
工作电压 (AC.V)	1000
线规 (mm²)	50、70、95、120、150、185、240





SF400A-MZ-N

外壳	PA6，UL94 V-0
绝缘体	PA6，UL94 V-0
接触件	铜镀银
接线方式	螺丝压接：50mm², 70mm², 95mm², 120mm², 150mm² 冷压接：185mm², 240mm²
接插次数	500
温度范围	-25℃ ~+85℃
耐压 (AC.V)	4500
额定电流 (A)	400

绝缘电阻 (MΩ)	≥ 500MSΩ
工作电压 (AC.V)	1000
线规 (mm²)	50、70、95、120、150、185、240





SF400A-MZ-PE

外壳	PA6，UL94 V-0
绝缘体	PA6，UL94 V-0
接触件	铜镀银
接线方式	螺丝压接：50mm², 70mm², 95mm², 120mm², 150mm² 冷压接：185mm², 240mm²
接插次数	500
温度范围	-25℃ ~+85℃
耐压 (AC.V)	4500
额定电流 (A)	400

绝缘电阻 (MΩ)	≥ 500MSΩ
工作电压 (AC.V)	1000
线规 (mm²)	50、70、95、120、150、185、240







大电流插头插座



产品型号		SF-0542
接地位置		6h
电流 (A)		200
尺寸 (mm)	a	302
	b	142
	c	134
	d	65
	Φ	45-66
电缆截面积 mm^2		70-150 柔性导体

名称	参数
电压 (V)	380V-415V~
极数	3P+PE
防护等级	IP67





产品型号		SF-3542
接地位置		6h
电流 (A)		200
尺寸 (mm)	a	140
	b	140
	c	120
	d	120
	e	145
	f	20
	g	120
	h	178
	i	9
	j	36
电缆截面积 mm^2		70-150 刚性或柔性导体

名称	参数
电压 (V)	380V-415V~
极数	3P+PE
防护等级	IP67





产品型号		SF-2542
接地位置		6h
电流 (A)		200
尺寸 (mm)	a	328
	b	162
	c	65
	Φ	45-66
电缆截面积 mm^2		70-150 柔性导体

名称	参数
电压 (V)	380V-415V~
极数	3P+PE
防护等级	IP67





产品型号		SF-0552
接地位置		6h
电流 (A)		200
尺寸 (mm)	a	302
	b	142
	c	134
	d	65
	Φ	45-66
电缆截面积 mm^2		70-150 柔性导体

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+PE
防护等级	IP67



大电流插头插座



产品型号		SF-3552
接地位置		6h
电流 (A)		200
尺寸 (mm)	a	140
	b	140
	c	120
	d	120
	e	145
	f	20
	g	120
	h	178
	i	9
	j	36
电缆截面积 mm^2		70-150 柔性导体

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+PE
防护等级	IP67





产品型号		SF-2552
接地位置		6h
电流 (A)		200
尺寸 (mm)	a	328
	b	162
	c	65
	Φ	44-66
电缆截面积 mm^2		70-150 柔性导体

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+PE
防护等级	IP67



产品型号		SF-0642	SF-0742
接地位置		6h	
电流 (A)		250	400
尺寸 (mm)	a	402	
	b	179	
	c	264	
	d	65	
	Φ	45-66	
电缆截面积 mm^2		120-150 刚性或柔性导体	185-240 刚性或柔性导体

名称	参数
电压 (V)	380V-415V~
极数	3P+PE
防护等级	IP67





产品型号		SF-3642	SF-3742
接地位置		6h	
电流 (A)		250	400
尺寸 (mm)	a	213	
	b	216	
	c	127	
	d	127	
	e	157	
	f	90	
	g	153	
	h	140	
	i	6	
电缆截面积 mm^2		120-150 刚性或柔性导体	185-240 刚性或柔性导体

名称	参数
电压 (V)	380V-415V~
极数	3P+PE
防护等级	IP67







大电流插头插座



产品型号		SF-2642	SF-2742
接地位置		6h	
电流 (A)		250	400
尺寸 (mm)	a	447	
	b	238	
	c	65	
	d	213	
	Φ	45-66	
电缆截面积 mm^2		120-150 刚性或柔性导体	185-240 刚性或柔性导体

名称	参数
电压 (V)	380V-415V~
极数	3P+PE
防护等级	IP67





产品型号		SF-0652	SF-0752
接地位置		6h	
电流 (A)		250	400
尺寸 (mm)	a	402	
	b	179	
	c	264	
	d	65	
	Φ	45-66	
电缆截面积 mm^2		120-150 刚性或柔性导体	185-240 刚性或柔性导体

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+PE
防护等级	IP67





产品型号		SF-3652	SF-3752
接地位置		6h	
电流 (A)		250	400
尺寸 (mm)	a	213	
	b	216	
	c	127	
	d	127	
	e	157	
	f	90	
	g	153	
	h	140	
	i	6	
电缆截面积 mm^2		120-150 刚性或柔性导体	185-240 刚性或柔性导体

名称	参数
电压 (V)	380V-415V~
极数	3P+N+PE
防护等级	IP67





产品型号		SF-2652	SF-2752
接地位置		6h	
电流 (A)		250	400
尺寸 (mm)	a	447	
	b	238	
	c	65	
	d	213	
	Φ	44-66	
电缆截面积 mm^2		120-150 刚性或柔性导体	185-240 刚性或柔性导体

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+PE
防护等级	IP67



大电流插头插座



SF-0542 附加底座

名称	电流 (A)	电压 (V)	极数	防护等级
参数	200A	380V-415V~	3P+PE	IP67

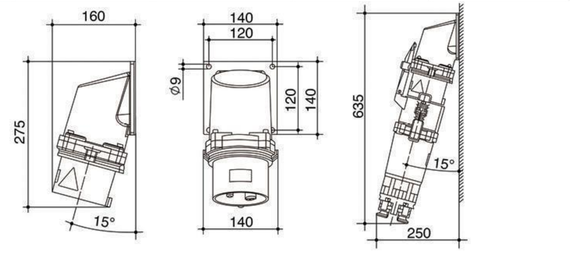



SF-0552 附加底座

名称	电流 (A)	电压 (V)	极数	防护等级
参数	200A	220-380V~ 240-415V~	3P+N+PE	IP67

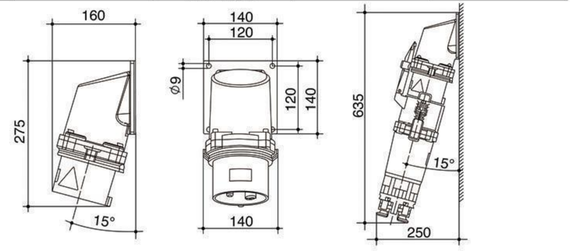



SF-0642
SF-0742 附加底座

名称	电流 (A)	电压 (V)	极数	防护等级
参数	250/400A	380V-415V~	3P+PE	IP67

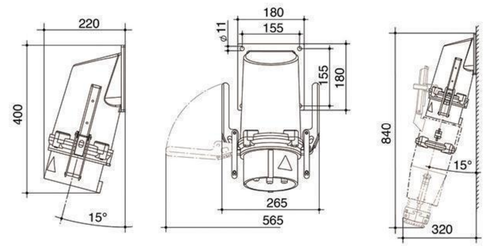



SF-0652
SF-0752 附加底座

名称	电流 (A)	电压 (V)	极数	防护等级
参数	250/400A	220-380V~ 240-415V~	3P+N+PE	IP67

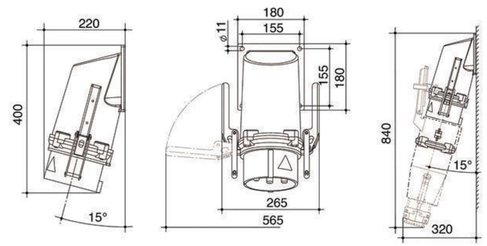





大电流插头插座



SF-3542 附加底座

名称	电流 (A)	电压 (V)	极数	防护等级
参数	200A	380V-415V~	3P+PE	IP67

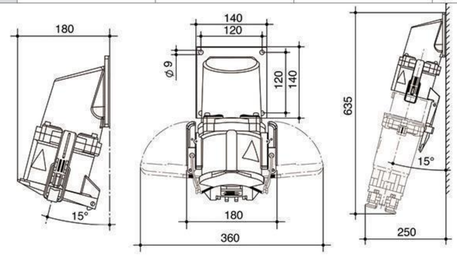



SF-3552 附加底座

名称	电流 (A)	电压 (V)	极数	防护等级
参数	200A	220-380V~ 240-415V~	3P+N+PE	IP67

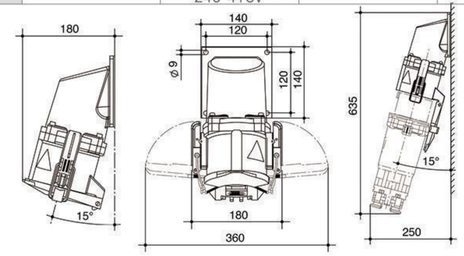



SF-3642
SF-3742 附加底座

名称	电流 (A)	电压 (V)	极数	防护等级
参数	250/400A	380V-415V~	3P+PE	IP67

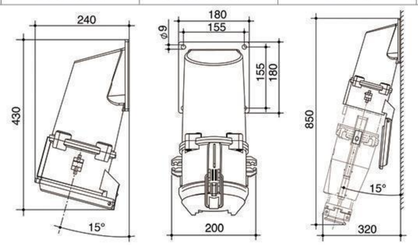



SF-3652
SF-3752 附加底座

名称	电流 (A)	电压 (V)	极数	防护等级
参数	250/400A	220-380V~ 240-415V~	3P+N+PE	IP67

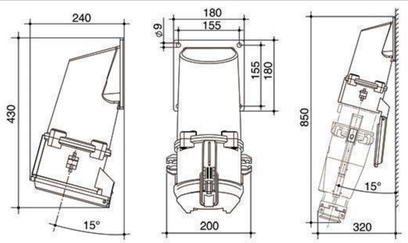

大电流插头插座



SF-0542 附加支架

名称	电流 (A)	电压 (V)	极数	防护等级
参数	200A	380V-415V~	3P+PE	IP67

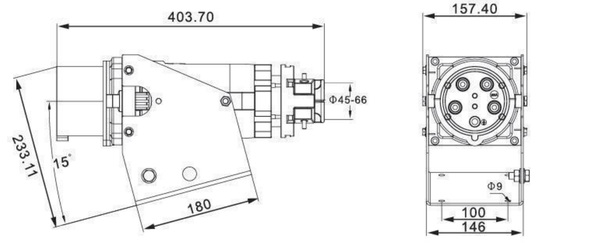



SF-0552 附加支架

名称	电流 (A)	电压 (V)	极数	防护等级
参数	200A	220-380V~ 240-415V~	3P+N+PE	IP67

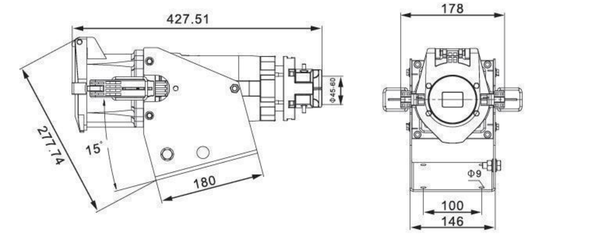



SF-2542 附加支架

名称	电流 (A)	电压 (V)	极数	防护等级
参数	200A	380V-415V~	3P+PE	IP67

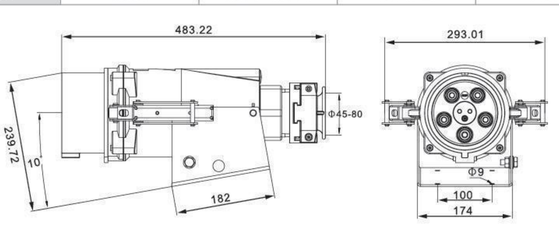



SF-2552 附加支架

名称	电流 (A)	电压 (V)	极数	防护等级
参数	200A	220-380V~ 240-415V~	3P+N+PE	IP67

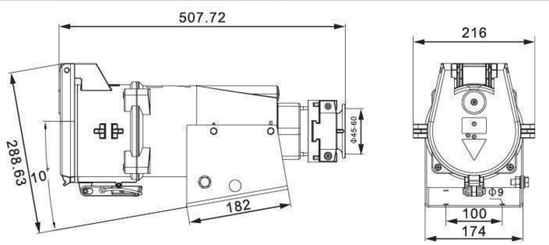



110V 50-60Hz	250V 50-60Hz	400V 50-60Hz	500V 50-60Hz	100-300 Hz > 50V	301-500 Hz > 50V
3pol 4h	3pol 6h	3pol 9h	3pol 7h	3pol 10h	3pol 12h
4pol 4h	4pol 9h	4pol 6h	4pol 7h	4pol 10h	4pol 12h
5pol 4h	5pol 9h	5pol 6h	5pol 7h	5pol 10h	5pol 12h

大电流插头插座



SF-0642
SF-0742 附加支架

名称	电流 (A)	电压 (V)	极数	防护等级
参数	250/400A	380V-415V~	/	IP67

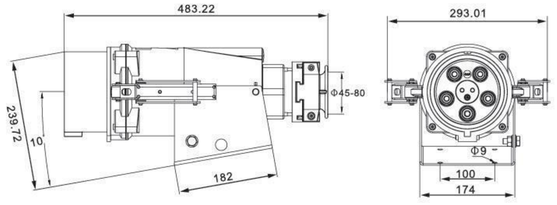



SF-0652
SF-0752 附加支架

名称	电流 (A)	电压 (V)	极数	防护等级
参数	250/400A	220-380V~ 240-415V~	3P+N+PE	IP67

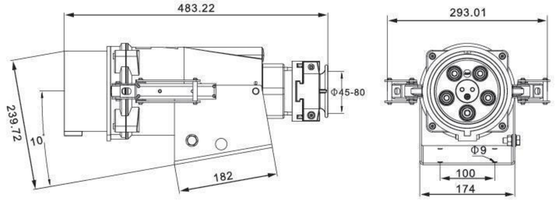



SF-2642
SF-2742
附加支架

名称	电流 (A)	电压 (V)	极数	防护等级
参数	250/400A	380V-415V~	3P+PE	IP67

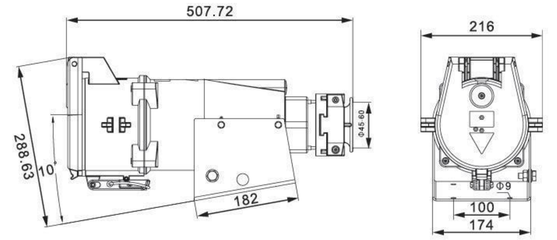



SF-2652
SF-2752
附加支架

名称	电流 (A)	电压 (V)	极数	防护等级
参数	250/400A	220-380V~ 240-415V~	3P+N+PE	IP67

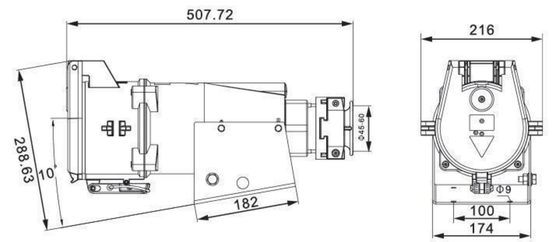



产品型号		SF-7781-4
接地位置		4h
电流 (A)		16A/10-16A
尺寸 (mm)	a	111
	b	47
	c	54
	d	51
	e	43
	f	38
电缆截面积 mm²		1-1.5

名称	参数
电压 (V)	100-130V~
极数	2P+E
防护等级	IP20





产品型号		SF-7781
接地位置		6h
电流 (A)		16A/10-16A
尺寸 (mm)	a	111
	b	47
	c	54
	d	51
	e	43
	f	38
电缆截面积 mm²		1-1.5

名称	参数
电压 (V)	200-250V~
极数	2P+E
防护等级	IP20





产品型号		SF-7782-4
接地位置		4h
电流 (A)		16A/10-16A
尺寸 (mm)	a	111
	b	47
	c	54
	d	51
	e	21
电缆截面积 mm²		1-1.5

名称	参数
电压 (V)	100-130V~
极数	2P+E
防护等级	IP20





产品型号		SF-7782
接地位置		6h
电流 (A)		16A/10-16A
尺寸 (mm)	a	111
	b	47
	c	54
	d	51
	e	21
电缆截面积 mm²		1-1.5

名称	参数
电压 (V)	200-250V~
极数	2P+E
防护等级	IP20









产品型号		SF-1312-4
接地位置		4h
电流 (A)		16A/10-16A
尺寸 (mm)	a	111
	b	47
	c	50
	d	47
	e	39
电缆截面积 mm^2		1-1.5

名称	参数
电压 (V)	100-130V~
极数	2P+E
防护等级	IP20





产品型号		SF-1312
接地位置		6h
电流 (A)		16A/10-16A
尺寸 (mm)	a	111
	b	47
	c	50
	d	47
	e	39
电缆截面积 mm^2		1-1.5

名称	参数
电压 (V)	200-250V~
极数	2P+E
防护等级	IP20





产品型号		SF-7300-4
接地位置		4h
电流 (A)		16A/10-16A
尺寸 (mm)	a	91
	b	100
	c	54
	d	69
	e	55
	f	106
电缆截面积 mm^2		1-1.5

名称	参数
电压 (V)	100-130V~
极数	2P+E
防护等级	IP20





产品型号		SF-7300
接地位置		6h
电流 (A)		16A/10-16A
尺寸 (mm)	a	91
	b	100
	c	54
	d	69
	e	55
	f	106
电缆截面积 mm^2		1-1.5

名称	参数
电压 (V)	200-250V~
极数	2P+E
防护等级	IP20





产品型号	SF-1012-4
电流 (A)	16A
输入	1plug 110V 2P+E
输出	2 connector 110V 2P+E
防护等级	IP44



产品型号	SFN-1013-4
电流 (A)	16A
输入	1plug 110V 2P+E
输出	3 connector 110V 2P+E
防护等级	IP44



产品型号	SF-1012
电流 (A)	16A
输入	1plug 220V 2P+E
输出	2 connector 220V 2P+E
防护等级	IP44



产品型号	SFN-1013
电流 (A)	16A
输入	1plug 220V 2P+E
输出	3 connector 220V 2P+E
防护等级	IP44



产品型号	SF-1012/4
电流 (A)	16A
输入	1plug 380V 3P+E
输出	2 connector 380V 3P+E
防护等级	IP44



产品型号	SFN-10132-4
电流 (A)	16A
输入	1plug 110V 2P+E
输出	3 connector 110V 2P+E
防护等级	IP67



产品型号	SF-1013-4
电流 (A)	16A
输入	1plug 110V 2P+E
输出	3 connector 110V 2P+E
防护等级	IP44



产品型号	SFN-10132
电流 (A)	16A
输入	1plug 220V 2P+E
输出	3 connector 220V 2P+E
防护等级	IP67



产品型号	SF-1013
电流 (A)	16A
输入	1plug 220V 2P+E
输出	3 connector 220V 2P+E
防护等级	IP44



产品型号	SF-1023
电流 (A)	32A
输入	1plug 220V 2P+E
输出	3 connector 220V 2P+E
防护等级	IP44







产品型号	SF-1014/214
电流 (A)	16A
输入	1plug 380V 3P+E
输出	3 connector 380V 3P+E
防护等级	IP44



产品型号	SF-1024/224
电流 (A)	32A
输入	1plug 380V 3P+E
输出	3 connector 380V 3P+E
防护等级	IP44



产品型号	SF-1015/215
电流 (A)	16A
输入	1plug 3P+N+E
输出	3 connector 220-380V~ 240-415V~ 3P+N+E
防护等级	IP44



产品型号	SF-1025/225
电流 (A)	32A
输入	1plug 380V 3P+N+E
输出	3 connector 220-380V~ 240-415V~ 3P+N+E
防护等级	IP44

电缆盘



拉杆式电缆盘

型号	SF-300SL-E/850	
电缆规格	绕线长度 (M)	输出功率 (W)
2×1.5	0-60	1200
3×1.5	0-50	1200
2×2.5	0-50	1700
3×2.5	0-50	1700
3×4	0-40	2300



拉杆式电缆盘

型号	SF-806L/650	
电缆规格	绕线长度 (M)	输出功率 (W)
2×1.5	0-60	1200
3×1.5	0-50	1200
2×2.5	0-50	1700
3×2.5	0-50	1700
3×4	0-40	2300



手提式电缆盘

型号	SF-806-10-3/580	
电缆规格	绕线长度 (M)	输出功率 (W)
2×1.5	0-60	1200
3×1.5	0-50	1200
2×2.5	0-50	1700
3×2.5	0-50	1700
3×4	0-40	2300



手提式电缆盘

型号	SF-806-10-4/620	
电缆规格	绕线长度 (M)	输出功率 (W)
2×1.5	0-60	1200
3×1.5	0-50	1200
2×2.5	0-50	1700
3×2.5	0-50	1700
3×4	0-40	2300

电缆盘



拉杆式电缆盘

型号	SF-300SL-E/850	
电缆规格	绕线长度 (M)	输出功率 (W)
2×1.5	0-60	1200
3×1.5	0-50	1200
2×2.5	0-50	1700
3×2.5	0-50	1700
3×4	0-40	2300



拉杆式电缆盘

型号	SF-806L/650	
电缆规格	绕线长度 (M)	输出功率 (W)
2×1.5	0-60	1200
3×1.5	0-50	1200
2×2.5	0-50	1700
3×2.5	0-50	1700
3×4	0-40	2300



手提式电缆盘

型号	SF-806-10-3/580	
电缆规格	绕线长度 (M)	输出功率 (W)
2×1.5	0-60	1200
3×1.5	0-50	1200
2×2.5	0-50	1700
3×2.5	0-50	1700
3×4	0-40	2300



手提式电缆盘

型号	SF-806-10-4/620	
电缆规格	绕线长度 (M)	输出功率 (W)
2×1.5	0-60	1200
3×1.5	0-50	1200
2×2.5	0-50	1700
3×2.5	0-50	1700
3×4	0-40	2300



手提式电缆盘

型号	SF-806-16-3/720	
电缆规格	绕线长度 (M)	输出功率 (W)
2×1.5	0-60	1200
3×1.5	0-50	1200
2×2.5	0-50	1700
3×2.5	0-50	1700
3×4	0-40	2300



手提式电缆盘

型号	SF-806-32-3/900	
电缆规格	绕线长度 (M)	输出功率 (W)
2×1.5	0-60	1200
3×1.5	0-50	1200
2×2.5	0-50	1700
3×2.5	0-50	1700
3×4	0-40	2300



手提式电缆盘

型号	SF-806-10-2T2/1020	
电缆规格	绕线长度 (M)	输出功率 (W)
2×1.5	0-60	1200
3×1.5	0-50	1200
2×2.5	0-50	1700
3×2.5	0-50	1700
3×4	0-40	2300



手提式电缆盘

型号	SF-806-16-3Q/600	
电缆规格	绕线长度 (M)	输出功率 (W)
2×1.5	0-60	1200
3×1.5	0-50	1200
2×2.5	0-50	1700
3×2.5	0-50	1700
3×4	0-40	2300







产品型号	SFN-10332/0132
电流 (A)	16A
输入	1plug 220V 2P+E
输出	3 connector 220V 2P+E
防护等级	IP67



产品型号	SF-164P	SF-164S
电流 (A)	16A	
电压 (V)	380V	
极数	3P+E	
防护等级	IP44	



产品型号	SFN-013/213
电流 (A)	16A
输入	1plug 220V 2P+E
输出	1 connector 220V 2P+E
防护等级	IP44



产品型号	SF-203S
电流 (A)	16A
电压 (V)	220V-240V~
极数	2P+E
防护等级	IP44



产品型号	SFN-0132/2132
电流 (A)	16A
输入	1plug 220V 2P+E
输出	1 connector 220V 2P+E
防护等级	IP67

产品型号	SF-018
电流 (A)	10A
电压 (V)	220V-240V~
极数	7P+E
防护等级	IP44



产品型号	SFN-213/012
电流 (A)	16A
输入	1plug 220V 2P+E
输出	1 connector 220V 2P+E
防护等级	IP67



产品型号	SF-118
电流 (A)	10A
电压 (V)	220V-240V~
极数	7P+E
防护等级	IP44



产品型号	SFN-1313
电流 (A)	16A
输入	1plug 220V 2P+E
输出	1 connector 220V 2P+E
防护等级	IP67



产品型号	SF-019
电流 (A)	10A
电压 (V)	220V-240V~
极数	7P+E
防护等级	IP44



产品型号	SFN-213/012
电流 (A)	16A
电压 (V)	220V-240V~
极数	2P+E
防护等级	IP44



产品型号	SF-119
电流 (A)	10A
电压 (V)	220V-240V~
极数	7P+E
防护等级	IP44

大电流插头



产品型号		SF-113K	SF-123K
接地位置		6h	
电流 (A)		16A	32A
尺寸 (mm)	a	105	115
	b	92	104
	Φ	3-18	3-18
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP44





产品型号		SF-114K	SF-124K
接地位置		6h	
电流 (A)		16A	32A
尺寸 (mm)	a	105	115
	b	92	104
	Φ	3-18	3-18
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP44





产品型号		SF-115K	SF-125K
接地位置		6h	
电流 (A)		16A	32A
尺寸 (mm)	a	110	115
	b	96	107
	Φ	3-18	3-18
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	220-380V~ 240-415V~
极数	3P+N+E
防护等级	IP44



指示灯插头
Indicator plug



产品型号		SFN-013K	SFN-023K
接地位置		6h	
电流 (A)		16A	32A
尺寸 (mm)	a	125	148
	b	88	102.5
	c	46.5	63
	d	52	67.5
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP44





110V 50-60Hz	250V 50-60Hz	400V 50-60Hz	500V 50-60Hz	100-300 Hz > 50V	301-500 Hz > 50V
3pol 4h	3pol 6h	3pol 9h	3pol 7h	3pol 10h	3pol 12h
4pol 4h	4pol 9h	4pol 6h	4pol 7h	4pol 10h	4pol 12h
5pol 4h	5pol 9h	5pol 6h	5pol 7h	5pol 10h	5pol 12h



产品型号		SFN-014K	SFN-024K
接地位置		6h	
电流 (A)		16A	32A
尺寸 (mm)	a	130	148
	b	93	102.5
	c	53	63
	d	58	67.5
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	380-415V~
极数	3P+E
防护等级	IP44





产品型号		SFN-015K	SFN-025K
接地位置		6h	
电流 (A)		16A	32A
尺寸 (mm)	a	135	152.5
	b	98	107
	c	60	70
	d	66	73.6
电缆截面积 mm^2		1-2.5	2.5-6

名称	参数
电压 (V)	220-380V~ / 240-415V~
极数	3P+N+E
防护等级	IP44



二级带保护插头
Two-pole protection plug



产品型号		SF-012
电流 (A)		16A
尺寸 (mm)	a	104
	b	42
	c	5
电缆截面积 mm^2		1-2.5

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP44



二级带保护耦合器
Two-pole protection coupler



产品型号		SF-212
电流 (A)		16A
尺寸 (mm)	a	54
	b	73
	c	64
电缆截面积 mm^2		1-2.5

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP44



二级带保护插座
Two-pole protection socket



产品型号		SF-112
电流 (A)		16A
尺寸 (mm)	a	54
	b	73
	c	64
电缆截面积 mm^2		1-2.5

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP44



二级带保护插座
Two-pole protection socket



产品型号		SFN-112M
电流 (A)		10A
尺寸 (mm)	a	54
	b	73
	c	64
电缆截面积 mm^2		1-2.5

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP44



二级暗装插座
Two-pole inside straight socket



产品型号		SF-312
电流 (A)		16A
尺寸 (mm)	a	50.6
	b	65
	c	41
	d	26
	e	38.5
	f	38.5
	g	5
电缆截面积 mm^2		1-2.5

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP44



二级暗装插座（黑色）
Two-pole inside straight socket



产品型号		SF-312
电流 (A)		16A
尺寸 (mm)	a	50.6
	b	65
	c	41
	d	26
	e	38.5
	f	38.5
	g	5
电缆截面积 mm^2		1-2.5

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP44







二级多功能插座
Two-pole multi-socket



产品型号		SFN-312
电流 (A)		10A
尺寸 (mm)	a	50.6
	b	65
	c	41
	d	26
	e	38.5
	f	38.5
	g	5
电缆截面积 mm^2		1-2.5

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP54



二级多功能插座
Two-pole multi-socket



产品型号		SFN-312M
电流 (A)		10A
尺寸 (mm)	a	50.6
	b	65
	c	41
	d	26
	e	38.5
	f	38.5
	g	5
电缆截面积 mm^2		1-2.5

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP44



二级多功能插座
Two-pole multi-socket



产品型号		SFN-312M
电流 (A)		10A
尺寸 (mm)	a	50.6
	b	65
	c	41
	d	26
	e	38.5
	f	38.5
	g	5
电缆截面积 mm^2		1-2.5

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP54



二级多功能插座
Two-pole multi-socket



产品型号		SFN-312K
电流 (A)		16A
尺寸 (mm)	a	50.6
	b	65
	c	41
	d	26
	e	38.5
	f	38.5
	g	5
电缆截面积 mm^2		1-2.5

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP54



民用防水插座
Waterproof load isolation switch



产品型号		SF-56510F	SF-56516F
电流 (A)		1P+N+PE	1P+N+PE
尺寸 (mm)	a	100	100
	b	100	100
	c	100/78	100/78
	d	38	38
	e	60/37	60/37

名称	参数
电压 (V)	220-240V~
极数	1P+N+PE
防护等级	IP66



多功能防水插座
Waterproof load isolation switch



产品型号		SF-56510S	SF-56515S
电流 (A)		1P+N+PE	1P+N+PE
尺寸 (mm)	a	100	100
	b	116	116
	c	100/78	100/78
	d	46	46
	e	60/37	60/37

名称	参数
电压 (V)	220-240V~
极数	2P+E
防护等级	IP44





产品型号	SF-203P
电流 (A)	15A
电压 (V)	220V-240V~
极数	2P+E
防护等级	IP44



产品型号	SF-303S-2
电流 (A)	30A
电压 (V)	220V-240V~
极数	2P+E
防护等级	IP44



产品型号	SF-303P
电流 (A)	30A
电压 (V)	220V-240V~
极数	2P+E
防护等级	IP44



产品型号	SF-024P
电流 (A)	30A
电压 (V)	380V~
极数	3P+E
防护等级	IP44



产品型号	SF-303S-1
电流 (A)	30A
电压 (V)	220V-240V~
极数	2P+E
防护等级	IP44



产品型号	SF-124S
电流 (A)	30A
电压 (V)	380V~
极数	3P+E
防护等级	IP44





透明保护窗罩



SF-5 窗口产品外形尺寸、安装孔及孔位图

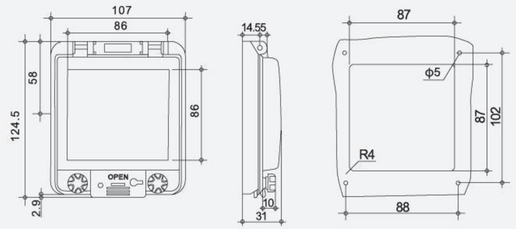



SF-2 窗口产品外形尺寸、安装孔及孔位图

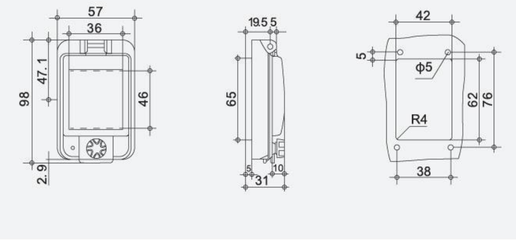



SF-3 窗口产品外形尺寸、安装孔及孔位图

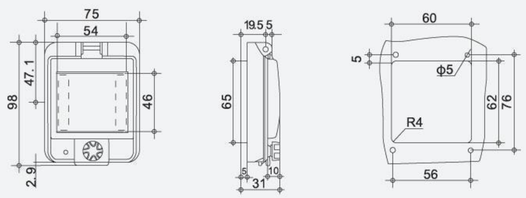



SF-4 窗口产品外形尺寸、安装孔及孔位图

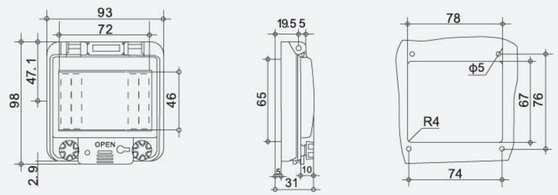

透明保护窗罩



SF-6 窗口产品外形尺寸、安装孔及孔位图

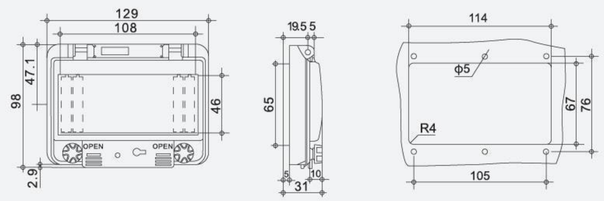



SF-8 窗口产品外形尺寸、安装孔及孔位图

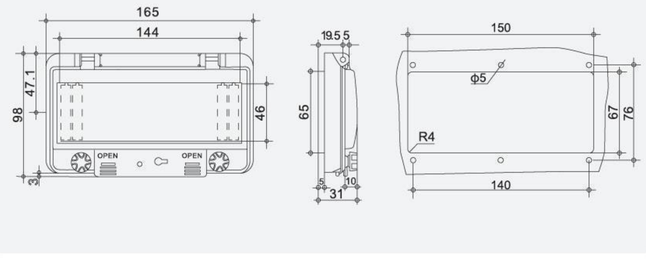



SF-10 窗口产品外形尺寸、安装孔及孔位图

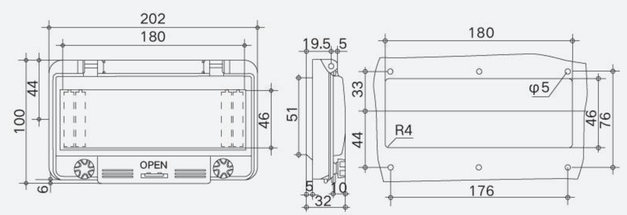



SF-12 窗口产品外形尺寸、安装孔及孔位图

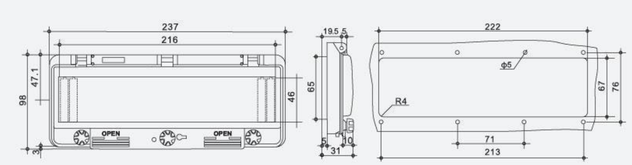





透明保护窗罩



SF-13 窗口产品外形尺寸、安装孔及孔位图

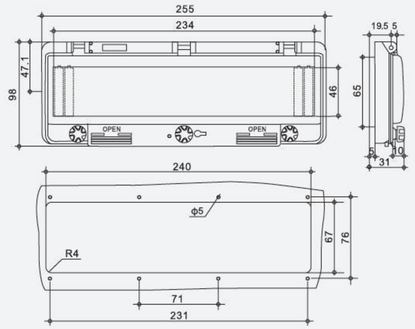



SF-16 窗口产品外形尺寸、安装孔及孔位图

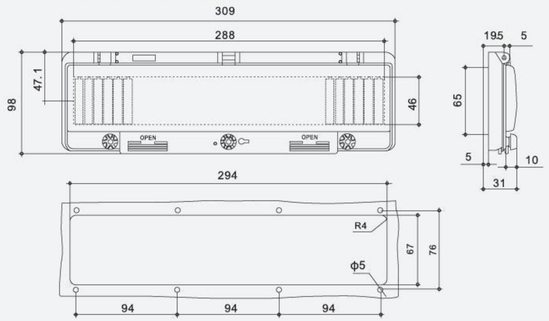



SF-18 窗口产品外形尺寸、安装孔及孔位图

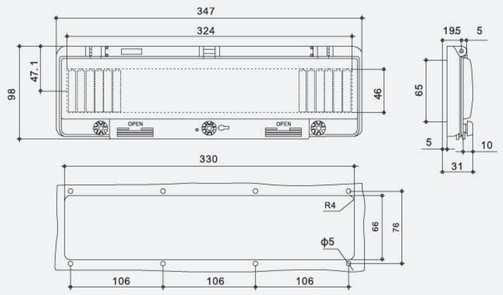

36 位移动式防水插座箱

- 执行标准：EN60439-4
  Implementation of the standards：EN60439-4
- 防护等级：IEC60529 IP44/IP67
  Protection class：IEC60529 IP44/IP67
- 颜色可选：黄 / 黑
  Colors：Yellow / Black







SF-1808 外形尺寸图

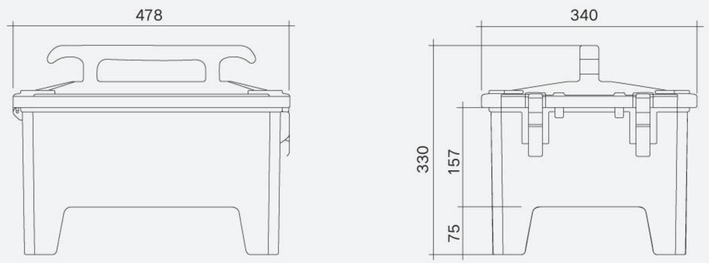



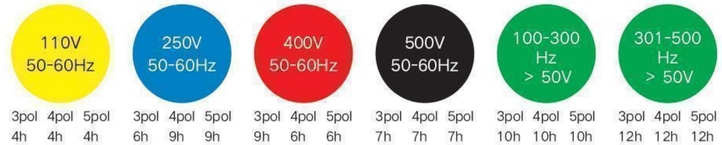

24 位移动式防水插座箱

- 执行标准：EN60439-4
  Implementation of the standards: EN60439-4
- 防护等级：IEC60529　IP44/IP67
  Protection class: IEC60529　IP44/IP67
- 颜色可选：黄 / 黑
  Colors: Yellow / Black







SF-1807 外形尺寸图

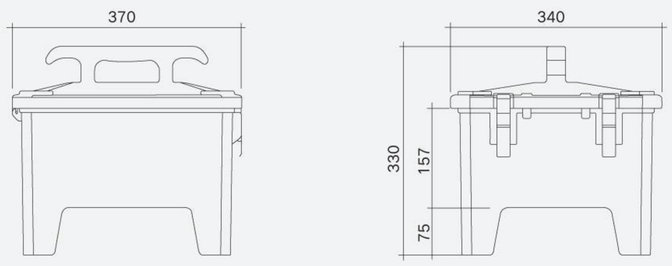

12 位移动式防水插座箱

- 执行标准：EN60439-4
  Implementation of the standards: EN60439-4
- 防护等级：IEC60529　IP44/IP67
  Protection class: IEC60529　IP44/IP67
- 颜色可选：黄 / 黑
  Colors: Yellow / Black







SF-1806 外形尺寸图

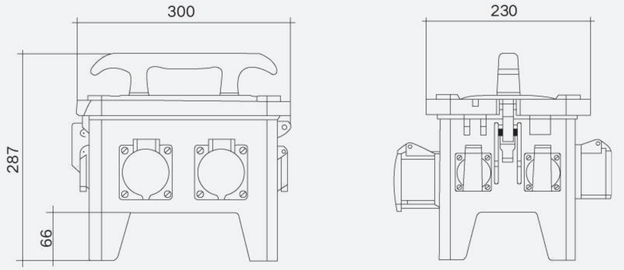





新型专业插座箱



壳体型号	SF-1902
12 回路窗口	1 只
4 回路窗口	3 只
SFN-6352	1 只
SFK-1366	4 只
SFN-312M	4 只
SFK-1390	4 只
NXBLE-63A/4P	1 只
NXB-16A/1P	8 只
NXB-16A/3P	4 只





壳体尺寸	330*330*170
SFK-1366	2 只
SFK-1399	2 只
NXBLE-16A/1P+N	2 只
NXB 32A/3P	2 只





壳体型号	SF-1902
12 回路窗口	1 只
4 回路窗口	3 只
SFN-6352	1 只
SFK-1366	4 只
SFN-312M	4 只
SFK-1390	4 只
NXBLE-63A/4P	1 只
NXB-16A/1P	8 只
NXB-16A/3P	4 只





壳体尺寸	330*330*170
SFK-3451	2 只
SFK-312M	4 只
NXBLE-63A/3P+N	1 只
NXB 63A/3P	1 只
NXB 32A/1P	2 只





12 位手提箱壳体尺寸	300*287*230
SFK-1366	3 只
SFN-312M	2 只
SFK-1385	3 只
NXB-63A/4P	1 只
NXB-63A/2P	1 只
NXB-32A/2P	1 只





壳体尺寸	280*280*150
SFK-240	2 只
NXBLE-32A/3P+N	2 只





24 位手提箱壳体尺寸	340*370*330
SFN-6352	1 只
SFK-1366	8 只
SFN-312M	2 只
信号灯	3 只
NXBLE-63A/4P	1 只
NXB-16A/1P	10 只





壳体尺寸	280*280*150
SFK-1366	1 只
SFK-1390	1 只
SFK-1385	1 只
NXB-16A/3P	2 只
NXBLE-16A/1P+N	1 只









壳体尺寸	280*380*150
SFK-1399	4 只
NXB 32A/3P	4 只





壳体尺寸	280*380*150
SFN-312M	4 只
SFK-1385	3 只
NXBLE-40A/1P+N	1 只
NXB-16A/3P	3 只





壳体尺寸	280*380*150
SF-315	3 只
SF-325	3 只
DZ47 63A/4P	3 只





壳体尺寸	330*530*170
SFK-1366	4 只
SFK-3451	3 只
NXBLE-63A/3P+N	1 只
NXB-16A/1P	4 只
NXB-32A/3P	3 只





壳体尺寸	330*430*170-1
SFK-228	3 只
SFK-218	2 只
NXB-16A/3P	3 只
NXBLE-40 16A/1P+N	2 只





壳体尺寸	330*430*170-2
SFK-1395	2 只
SFK-3451	2 只
NXB-63A/4P	1 只
NXBLE-32A/1P+N	2 只
NXBLE-32A/3P+N	2 只





壳体尺寸	260*170*140
SFK-1366	2 只
NXBLE-32A/2P	1 只
NXB-16A/1P	2 只





壳体尺寸	260*170*140
SFK-312M	3 只
NXBLE-40 16A/1P+N	3 只









壳体尺寸	260*170*140
SFK-240	1 只
NXBLE-32A/4P	1 只





壳体尺寸	260*170*140
SFK-3451	1 只
SFK-312M	2 只
NXBLE-32A/4P	1 只





壳体尺寸	220*340*150
SFK-312M	2 只
SFK-1475	2 只
NXBLE-63A/2P	1 只
NXB-16A/1P	4 只





壳体尺寸	300*400*160
SFK-1366	3 只
SFK-1385	3 只
NXB-16A/1P	3 只
NXB-16A/3P	3 只





壳体尺寸	270*460*150
SFK-1475	2 只
SFK-1485	2 只
NXBLE-40 16A/1P+N	2 只
NXB-16A/3P	2 只





壳体尺寸	300*520*160
SFK-1366	3 只
SFK-3451	3 只
NXBLE-40 16A/1P+N	3 只
NXB-32A/3P	3 只
NXB-63A/4P	1 只





壳体尺寸	300*520*160
SFK-1475	3 只
SFK-1551	2 只
NXB-63A/4P	3 只
NXBLE 16A/1P+N	3 只
NXBLE-63A/4P	1 只





壳体尺寸	360*540*180
SFK-1551:2	
SFK-1475:1	
SFK-312M:1	
NM1-125A/3P	
NXB 32A/3P	
NXBLE-16A/1P+N	









壳体尺寸	360*540*180
SFK-240	4 只
SF-56510	2 只
DZ47LE-63A/4P	1 只
DZ47-16A/1P	2 只
DZ47-32A/3P	4 只





壳体尺寸	360*540*180
12 回路窗口	2 只
SFK-240	2 只
SFK-218	4 只
SFK-1114	1 只
电线	5*10²：2m
NXBLE-63A/4P	1 只
NXB-16A/1P	4 只
NXB-32A/3P	2 只





壳体尺寸	360*540*180 带手柄
12 回路窗口	2 只
SFK-240	3 只
SFK-218	4 只
SFK-1114	1 只
电线	5*10²：2m
NXBLE-63A/4P	1 只
NXB-16A/1P	4 只
NXB-32A/3P	3 只





壳体尺寸	300*400*160 带手柄
12 回路窗口	1 只
SFN-4352	3 只
SFK-1114	1 只
电线	5*10²：2m
NXB-63A/4P	3 只





壳体尺寸	300*400*160 带手柄
12 回路窗口	1 只
SFN-1551	3 只
SFK-1114	1 只
电线	5*10²：2m
NXB-32A/4P	3 只





壳体尺寸	300*400*160
5 回路窗口	1 只
8 回路窗口	1 只
SFK-1385	1 只
SFK-3451	1 只
SFN-312M	1 只
2+3 86 型插座	1 只
NXBLE 63A/4P	1 只





壳体尺寸	500*680*200
5 回路窗口	2 只
18 回路窗口	2 只
SFK-218	2 只
SFK-240	3 只
NM1-125A/3P	2 只
NXBLE-32A/4P	3 只
NXBLE-16A/1P+N	2 只
NXB-100A/4P	1 只 (备用)
单芯 400A 插座黄、绿、红、蓝、黑各 1 只	





壳体尺寸	320*540*130 (铁箱)
13 回路窗口	1 只
SFN-4252	1 只
SFN-4352	1 只
SFN-4132	2 只
Vigi ic65 ELE 4P 63A 30mA	1 只
IC65N 2P CA	1 只
Vigi ic65 ELE 2PCA 30mA	1 只









壳体尺寸	300*520*160
8 回路窗口	2 只
SFK-1385	1 只
SFK-3451	1 只
SFN-312M	1 只
2+3 10A86 型防水插座	1 只
IC65N 4P D63A	1 只
Vigi ic65 ELE 4P 63A 30mA	1 只
iC65H D 16A/3P	1 只
iC65H D 32A/3P	1 只
iC65H D 16A/1P	1 只
iC65H D 10A/1P	1 只





壳体型号	SF-1805B
SFN-4132	3 只
DZ30L 1P+N C40	1 只
DZ47 16A/1P	3 只





壳体尺寸	300*400*160
5 回路窗口	1 只
8 回路窗口	1 只
SFK-240	1 只
SFK-228	1 只
SFN-312M	1 只
2+3 86 型插座	1 只
NXBLE 63A/4P	1 只





壳体型号	SF-1805B
SFK-1474	4 只
DZ30L 1P+N C40	1 只
DZ47 16A/1P	4 只





壳体尺寸	300*520*160
8 回路窗口	2 只
SFK-228	1 只
SFK-240	1 只
SFN-312M	1 只
2+3 10A86 型防水插座	1 只
IC65N 4P D63A	1 只
Vigi ic65 ELE 4P 63A 30mA	1 只
iC65H D 16A/3P	1 只
iC65H D 32A/3P	1 只
iC65H D 16A/1P	1 只
iC65H D 10A/1P	1 只





壳体型号	SF-1805B
SFK-1475	4 只
DZ30L 1P+N C40	1 只
DZ47 16A/1P	4 只





壳体型号	SF-1805B
SFN-4132-4	3 只
DZ30L 1P+N C40	1 只
DZ47 16A/1P	3 只





壳体型号	SF-1805B
SFK-1463	4 只
DZ30L 1P+N C40	1 只
DZ47 16A/1P	4 只









壳体尺寸	390*250*270mm
SFN-3152	2 只
SFN-325	1 只
SFN-323	1 只
DZ47:3P 32A	1 只
DZ47:3P 63A	1 只
DZ47:3P 63A 漏电	1 只



壳体尺寸	420*420*500mm
SFN-312	3 只
SFN-314	3 只
SFN-3152	2 只
SFN-313	3 只
DZ47:3P 32A	1 只
DZ47:1P 16A	3 只
DZ47:3P 40A	1 只
DZ47:2P 16A	3 只



壳体尺寸	380*380*520mm
指示灯 :220V	3 只
SFN-6352	1 只
SFN-3132	3 只
SFN-3252	1 只
SFN-56510	3 只
86 型 10A 三孔插座	3 只
DZ47-60A/4	1 只
DZ47LE-32/3+N	1 只
DZ47LE-16A/1+N	3 只
DZ47LE-10A/1+N	6 只



壳体型号	SF-1902
12 回路窗口	1 只
4 回路窗口	3 只
SFN-6352	1 只
SFK-1366	4 只
SFN-312M	4 只
SFK-1390	4 只
NXBLE-63A/4P	1 只
NXB-16A/1P	8 只
NXB-16A/3P	4 只



移动式插座箱

箱体尺寸	340*370*330mm
SFN-312	4 只
SFN-325	2 只
SFN-315	2 只
DZ47-16/1	4 只
DZ47-16/3	2 只
DZ47-32/3	2 只
DZ47-60/3	1 只

移动式插座箱

箱体尺寸	340*370*330mm
SFN-3132	6 只
SFN-3232	2 只
SFN-0352	1 只
CDB3LE-16	6 只
CDB3LE-32	2 只
DZ47-100/4	1 只



移动式插座箱

箱体尺寸	300*230*287mm
SFN-3232	4 只
DZ47-32/2	4 只
DZ47-60/4	1 只



移动式插座箱

箱体尺寸	230*300*287mm
SFN-315	4 只
SFN-312	4 只
SFN-025	1 只
DZ47-20/1	1 只
DZ47-32/3	2 只
DZ47-60/3	1 只



移动式插座箱

箱体尺寸	300*230*287mm
SFN-312	3 只
SFN-314	2 只
SFN-615	1 只
DZ47-16/1	3 只
DZ47-16/3	2 只
DZ47-32/3	1 只



移动式插座箱

箱体尺寸	230*300*287mm
SFN-315	2 只
SFN-312	4 只
SFN-313	2 只
DZ47:2P 32A	1 只
DZ47:2P 40A	1 只
DZ47:4P 60A	1 只
DZ47:3P 32A	1 只
DZ47:1P 20A	2 只



移动式插座箱

箱体尺寸	340*370*330mm
SFN-312	10 只
SFN-3152	6 只
SFN-0352	1 只
DZ47-16/1	5 只
DZ47-16/3	6 只



移动式插座箱

箱体尺寸	230*300*287mm
SFN-315	2 只
SFN-313	2 只
SFN-312	1 只
DZ47:2P 32A	2 只
DZ47:4P 32A	1 只



手提式插座箱 1805

壳体尺寸	430*140*95mm
SF-312	6 只
DZ47-16/1	6 只



手提式插座箱 1805

壳体尺寸	340*140*95mm
SF-313	3 只
DZ47LE-40/1	1 只
DZ47-16/1	3 只



手提式插座箱 1805

箱体尺寸	430*140*95mm
SF-413	3 只
SFN-013	1 只
DZ47-40/2	1 只
DZ47-16/1	3 只
电线 :3*2.5^2	5 米



手提式插座箱 1805

壳体尺寸	430*140*95mm
SFN-3152	3 只
DZ47:4P 50A	1 只

手提式插座箱 1805

箱体尺寸	430*140*95mm
SF-413	2 只
SF-312	2 只
DZ47-16/1	2 只
CDB3LE-60	1 只

手提式插座箱 1805

箱体尺寸	430*140*95mm
SF-413	3 只
CDB3LE-40	1 只
DZ47-16/1	3 只



手提式插座箱 1805

箱体尺寸	430*140*95mm
SFN-4132	3 只
DZ47:2P 16A	3 只



手提式插座箱 1805

箱体尺寸	430*140*95mm
SF-413-4	4 只
DZ47:1P 16A	4 只



手提式插座箱 1805

箱体尺寸	430*140*95mm
SF-3132	3 只
CDB3LE-40	1 只
DZ47-16/1	3 只



手提式插座箱 1805

箱体尺寸	430*140*95mm
SF-312	2 只
SF-323	1 只
DZ47:2P 16A	2 只
DZ47:2P 32A	1 只



手提式插座箱 1805-2

箱体尺寸	430*140*95mm
SFN-312	8 只
DZ47-20	3 只



手提式插座箱 1805-2

箱体尺寸	430*140*95mm
SF-312	2 只
SF-3142	2 只
DZ47:32/3P	1 只
DZ47:16/1P	2 只







手提式插座箱 1805-2

壳体尺寸	430*140*95mm
SFN-415	3 只
DZ47-32/3	1 只
DZ47-16/3	1 只



手提式电源插座箱 1805-2

壳体尺寸	490*140*95mm
SFN-3232	3 只
DZ47LE-40/3	1 只
电线 :5*4^2	3 米



手提式插座箱 1805

箱体尺寸	430*140*95mm
SF-313	2 只
SF-013	1 只
电线 1.5mm^2	30m
DZ47LE-32/1	1 只
DZ47-16/1	2 只



手提式插座箱 1805

壳体尺寸	430*140*95mm
SF-314	2 只
SF-014	1 只
DZ47:3P 16A	2 只
电线 1.5mm^2	30m



电源插座箱

箱体尺寸	150*250*100mm
SFN-312	2 只
DZ47-16/1	2 只



电源插座箱

箱体尺寸	125*125*75mm
SF-315	1 只



电源插座箱

箱体尺寸	250*150*100mm
SFN-315	2 只
SFN-325	1 只



电源插座箱

箱体尺寸	250*150*100mm
SF-315	1 只
DZ47:4P 16A	1 只



电源插座箱

箱体尺寸	250*150*100mm
SFN-4132	2 只



电源插座箱

箱体尺寸	400*300*160mm
SFN-4352	1 只
SFN-4132	1 只
DZ47:4P 63A	1 只
DZ47:2P 16A	1 只



手提式插座箱

箱体尺寸	260*170*140mm
SFN-313	2 只
DZ47:2P 16A	2 只



电源插座箱

箱体尺寸	260*170*140mm
SF-335	1 只
DZ47:4P 63A	2 只



手提式插座箱

壳体尺寸	260*170*140mm
SFN-315	2 只
DZ47:4P 16A	2 只



手提式插座箱

壳体尺寸	260*170*140mm
SFN-3152	1 只
SF-312	2 只
DZ47:4P 16A	1 只
DZ47:2P 16A	2 只



手提式插座箱

箱体尺寸	260*170*140mm
SFN-3132	2 只
DZ47LE-16/2	2 只



电源插座箱

壳体尺寸	280*220*125mm
SF-313	1 只
SF-315	1 只
DZ47:2P 16A	1 只
DZ47:4P 16A	1 只



电源插座箱

箱体尺寸	250*220*125mm
SFN-315	1 只
SFN-313	1 只
DZ47:2P 16A	1 只
DZ47:4P 16A	1 只



电源插座箱

箱体尺寸	280*220*125mm
SFN-313	1 只
SFN-314	1 只
DZ47:2P 16A	1 只
DZ47:4P 16A	1 只



电源插座箱

箱体尺寸	540*360*180mm
SFN-313	4 只
SFN-324	3 只
SFN-323	1 只
DZ47LE-60/4	1 只
DZ47-32/3P	3 只
DZ47-16/1P	4 只
DZ47-32/1P	1 只



电源插座箱

A+B+B	
SFN-3132	3 只
SFN-3152	1 只
NL1E-60/4	1 只
DZ47-32/3	1 只
DZ47-16/1	3 只



电源插座箱

箱体尺寸	540*360*180mm
SFN-3342	3 只
SFN-323	2 只
CDB2LE-125/4P	1 只
DZ47-60/3P	3 只
DZ47-32/1P	2 只



电源插座箱

箱体尺寸	400*300*160mm
SFN-313	6 只
DZ47-60/4P	1 只
DZ47-16/1P	6 只



电源插座箱

箱体尺寸	540*360*180mm
SFN-3352	4 只
DZ47-60/3P	4 只



电源插座箱

箱体尺寸	400*300*160mm
SF-4242	2 只
SF-4132	3 只



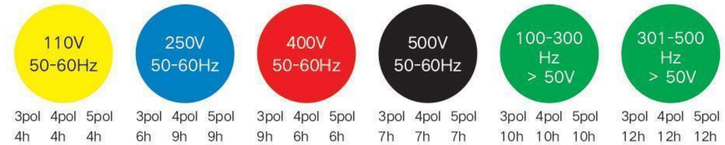



电源插座箱

壳体尺寸	520*300*160mm
SF-315	3 只
SF-314	4 只
指示灯	1 只
NL1E-40	2 只
NL1E-63	1 只



机械联锁插座箱

壳体尺寸	540*360*180mm
机械联锁 SFN-413	2 只
机械联锁 SFN-414	2 只
DZ47-16/3P	2 只
DZ47-16/2P	2 只



电源插座箱

箱体尺寸	540*360*180mm
SFN-4352	1 只
SFN-4332	2 只
DZ47 4P 63A	1 只
DZ47LE 2P 63A	2 只



电源插座箱

壳体尺寸	400*300*160mm
SFN-324	2 只
SFN-313	1 只
DZ47LE-60/4	1 只
DZ47-16/3	2 只
DZ47-16/2	1 只



电源插座箱

壳体尺寸	520*300*160mm
SFN-3152	1 只
SFN-3132	4 只
DZ47LE-60/4P	1 只
DZ47-16/3P	1 只
DZ47-32/2P	1 只
DZ47-16/1P	1 只



电源插座箱

箱体尺寸	400*300*160mm
SFN-3252	2 只
SF-312	3 只
DZ47-32/3	2 只
DZ47-16/1	3 只



电源插座箱

壳体尺寸	560*400*200mm
SFN-4352	2 只
SFN-425	2 只
AC 10A 2 插	1 只
AC 10A 3 插	1 只
DZ47-60/4P	2 只
DZ47-32/4P	2 只



电源插座箱

A+B+B	
SFN-312	2 只
SFN-313	2 只
SFN-314	1 只
DFN-324	1 只
DZ47-16/3	1 只
DZ47-32/3	1 只
DZ47-16/1	3 只
DZ47-32/1	1 只



电源插座箱

箱体尺寸	360*540*180mm
SFN-3132	2 只
SFN-3142	2 只
SFN-3342	2 只
DZ47-16/2	2 只
DZ47-32/3	2 只
DZ47-60/3	2 只
PZ158-125/4	1 只



电源插座箱

箱体尺寸	540*360*180mm
SF-312	3 只
SFN-413	1 只
SFN-415	1 只



组合插座箱 A+B+B

SFN-313	2 只
SFN-314	2 只
SFN-315	1 只
DZ47-16/1	2 只
DZ47-16/3	2 只
DZ47-32/3	1 只



电源插座箱

箱体尺寸	400*300*180mm
SFN-313	3 只
SFN-314	3 只
DZ47:2P 16A	3 只
DZ47:3P 32A	2 只



电源插座箱

壳体尺寸	520*300*160mm
SFN-3132	1 只
SFN-3142	1 只
SFN-313	1 只
SFN-314	1 只



电源插座箱

壳体尺寸	400*300*160mm
SF-312	3 只
SFN-4232	1 只
SFN-4242	1 只



电源插座箱

箱体尺寸	300*400*160mm
SF-312	3 只
SFN-313	1 只
SFN-314	1 只
SFN-315	1 只
DZ47:2P 16A	1 只
DZ47:2P 32A	1 只
DZ47:3P 16A	1 只
DZ47:4P 16A	1 只



电源插座箱

壳体尺寸	540*360*180mm
SF-313	2 只
SF-314	2 只
SF-334	1 只
DZ47:2P 16A	2 只
DZ47:3P 16A	2 只
DZ47:3P 63A	1 只
DZ47LE-60/4	1 只



电源插座箱

壳体尺寸	540*360*180mm
SFN-313	1 只
SFN-314	1 只
SFN-315	1 只
SFN-3332	1 只
SFN-3352	1 只



电源插座箱

箱体尺寸	300*400*160mm
SFN-4132	1 只
SFN-4352	1 只
DZ47-63/3	2 只
DZ47-16/1	2 只



电源插座箱

壳体尺寸	280*380*130mm
SFN-312	2 只
SFN-4251	1 只
DZ47-10/1	2 只
DZ47-32/3	1 只



电源插座箱

箱体尺寸	300*400*160mm
SFN-415	2 只
SFN-425	2 只
DZ47-16/3	2 只
DZ47-32/2	2 只



电源插座箱

箱体尺寸	300*400*160mm
SFN-4152	3 只
DZ47-16/3	3 只
DZ47-60/3	1 只



电源插座箱

箱体尺寸	300*400*160mm
SFN-312	1 只
SFN-413	2 只
SFN-415	2 只
DZ47LE-60/4	1 只
DZ47-32/1	1 只
DZ47-40/3	1 只



电源插座箱

壳体尺寸	300*520*160mm
SFN-423	2 只
SFN-425	1 只
DZ47-60/4	1 只
DZ47LE-32/2	2 只
DZ47LE-32/4	1 只



电源插座箱

箱体尺寸	300*520*160mm
SFN-4132	2 只
SFN-4242	1 只
DZ47-16/1	2 只
DZ47-32/3	6 只



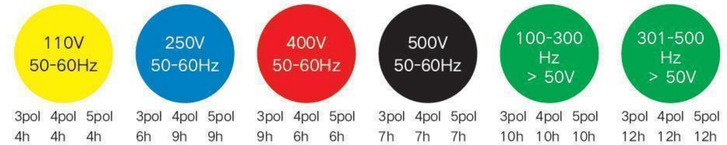



电源插座箱

壳体尺寸	300*400*160mm
SFN-4131	4 只
SFN-4151	1 只
DZ47-60/4	1 只
DZ47-16/3	1 只
DZ47-16/1	4 只



电源插座箱

壳体尺寸	340*220*150mm
SFN-3132	1 只
SFN-3252	1 只
DZ47:16A 2P	1 只
DZ47:32A 4P	1 只



电源插座箱

箱体尺寸	380*280*180mm
SFN-313	1 只
SFN-323	1 只
SFN-415	1 只
SFN-425	1 只
DZ47:2P 16A	1 只
DZ47:2P 32A	1 只
DZ47:3P 16A	1 只
DZ47:3P 32A	1 只



电源插座箱

壳体尺寸	220*340*150mm
SFN-313	2 只
SFN-315	2 只
DZ47:2P 32A	1 只
DZ47:3P 63A	1 只



电源插座箱

壳体尺寸	270*460*160mm
SF-312	2 只
SFN-315	3 只
DZ47:3P 63A 漏电	1 只
DZ47:2P 16A	1 只



电源插座箱

箱体尺寸	400*300*160mm
SF-312	4 只
SFN-3132	1 只
SFN-3152	1 只
SFN-3232	1 只
DZ47 1P 32A	3 只
DZ47 3P 16A	1 只
DZ47 3P 32A	1 只
NL1E-60/4	1 只



电源插座箱

壳体尺寸	300*520*160mm
SF-312	4 只
SFN-313	1 只
SFN-315	1 只
SFN-325	1 只
DZ47:3P 63A 漏电	1 只
DZ47:2P 32A	2 只
DZ47:3P 32A	1 只
DZ47:3P 16A	1 只



电源插座箱

壳体尺寸	520*300*160mm
SFN-3132	2 只
SFN-3252	2 只
DZ47LE:3P 63A 漏电	1 只
DZ47:1P 16A	2 只
DZ47:3P 16A	1 只
DZ47:3P 32A	1 只



机械插座箱

箱体尺寸	300*520*160mm
机械联锁 SFN-413	1 只
机械联锁 SFN-414	1 只
机械联锁 SFN-415	1 只



电源插座箱

箱体尺寸	400*300*160mm
SFN-3132	2 只
SFN-3252	2 只
DZ47:2P 16A	2 只
DZ47:4P 63A	1 只



电源插座箱

箱体尺寸	520*300*160mm
SFN-315	1 只
SFN-325	1 只
SFN-4352	1 只
SFN-312	2 只
DZ47:3P 63A	1 只
DZ47:3P 32A	1 只
DZ47:3P 16A	1 只
DZ47:2P 16A	2 只



电源插座箱

箱体尺寸	520*300*160mm
SFN-3132	2 只
SFN-335	2 只
DZ47:3P 63A	2 只
DZ47:2P 16A	2 只
DZ47:3P 100A 漏电	1 只



电源插座箱

壳体尺寸	220*340*150mm
SFN-312	3 只
DZ47-16/1	3 只



电源插座箱

壳体尺寸	520*300*160mm
SF-313	6 只
DZ47:2P 32A	3 只



电源插座箱

箱体尺寸	520*300*160mm
SFN-3132	1 只
SFN-3152	1 只
SFN-4352	1 只
DZ47:2P 16A	1 只
DZ47:4P 16A	1 只
DZ47:4P 63A	1 只



电源插座箱

壳体尺寸	330*492*175mm
SFN-3152	3 只
DZ47-16/3	3 只
DZ47LE-63/4	1 只



电源插座箱

壳体尺寸	300*430*175mm
SFN-313	5 只
SFN-315	4 只
DZ47-16/1	3 只
DZ47-32/3	2 只
DZ47-63/4	1 只



电源插座箱

壳体尺寸	280*342*155mm
SFN-413	4 只
DZ47-16/2	4 只
DZ47-63/4	1 只



电源插座箱

壳体尺寸	500*680*200mm
SFN-313	5 只
SFN-315	5 只
SFN-325	5 只
DZ47-16/2	2 只
DZ47-16/3	2 只
DZ47-32/3	2 只
DZ158-125/4	1 只



电源插座箱

壳体尺寸	330*392*175mm
SFN-312	2 只
SFN-415	3 只
DZ47-32/1	2 只
DZ47-16/3	1 只
DZ47-63/1	1 只



电源插座箱

壳体尺寸	300*530*175mm
SFN-413	4 只
SFN-415	3 只
DZ47-16/1	4 只
DZ47-16/3	3 只
DZ47LE-63/4	1 只



电源插座箱

壳体尺寸	280*342*155mm
SFN-413	3 只
SFN-415	3 只
DZ47-16/3	2 只
DZ47-16/1	3 只
DZ47-63/4	1 只



电源插座箱

箱体尺寸	300*400*160mm
SFN-323	2 只
SFN-3342	1 只
DZ47-60/4	1 只
DZ47-60/3	1 只
DZ47-32/1	2 只



电源插座箱

壳体尺寸	300*400*160mm
SFN-413	2 只
SFN-425	1 只
DZ47-16/2	2 只
DZ47-32/4	1 只



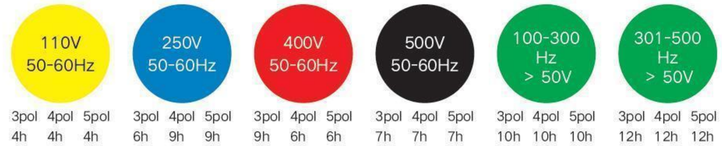



电源插座箱

壳体尺寸	300*400*160mm
SFN-312	3 只
SFN-314	1 只
SFN-325	1 只
DZ47-16/1	3 只
DZ47-16/3	1 只
DZ47-32/3	1 只



电源插座箱

壳体尺寸	300*400*160mm
SFN-313	3 只
SFN-3252	2 只
DZ47-16/1	3 只
DZ47-32/3	2 只
DZ47-60/3	1 只



电源插座箱

箱体尺寸	360*540*180mm
SFN-313	3 只
SFN-324	2 只
SFN-3342	2 只
CDB2LE-100/4	1 只
DZ47-16/1	3 只
DZ47-32/3	2 只
DZ47-61/3	2 只



电源插座箱

壳体尺寸	300*520*160mm
SFN-312	4 只
SFN-415	2 只
SFN-425	1 只
DZ47LE-60/4	1 只
DZ47-16/3	2 只
DZ47-32/3	1 只
DZ47-16/1	4 只



电源插座箱

壳体尺寸	300*520*160mm
SFN-313	3 只
SFN-315	1 只
SFN-325	1 只



手提电源插座箱

箱体尺寸	300*400*160mm
SF-413	4 只
SFN-414	1 只
NL1E-16/4	1 只
CDB3LE-16	4 只



电源插座箱

壳体尺寸	300*520*160mm
SFN-4252	1 只
SFN-4352	2 只
CDB2-100A/3	1 只
DZ47-60/3	2 只
DZ47-32/3	1 只



电源插座箱

壳体尺寸	300*400*160mm
SFN-3132	3 只
SFN-3252	3 只
DZ47-16/1	3 只
DZ47-32/3	3 只



电源插座箱

箱体尺寸	680*400*200mm
SF-4352	2 只
SF-4452	2 只
AC 10A 二插	1 只
AC 16A 三插	1 只
DZ47-60/3	2 只
CDB2-100/3	2 只



电源插座箱

箱体尺寸	330*430*170mm
SF-314	5 只
SF-313	1 只
DZ47-60/4	1 只
DZ47-32/3	3 只



电源插座箱

箱体尺寸	300*400*160mm
SF-4352	2 只
SF-312	1 只
多功能五孔墙壁开关	2 只
NL1E-32/4	2 只
CPB3LE-16	2 只



电源插座箱

箱体尺寸	330*530*170mm
SF-314	5 只
SF-313	3 只
DZ47-16/3	5 只
DZ47-16/1	3 只
DZ47LE-60/4	1 只



电源插座箱

壳体尺寸	300*400*160mm
SFN-3252	2 只
DZ47-60/3,4	1 只
DZ47-32/2	2 只
DZ47-16/2	2 只
AC 10A 二插	1 只
AC 16A 三插	1 只



电源插座箱

壳体尺寸	220*340*150mm
SFN-313	1 只
SFN-324	1 只
CDB3LE-16/1	1 只
DZ47LE-32/3	1 只



电源插座箱

箱体尺寸	300*400*160mm
SFN-3132	2 只
SFN-3252	2 只
DZ47-32/3	2 只
DZ47-16/1	2 只



组合电源插座箱

A+B+B	
SFN-313	1 只
SFN-323	1 只
SFN-314	1 只
SFN-315	2 只
NL1E-60/4	1 只
DZ47-32/3	1 只
DZ47-16/3	1 只
DZ47-32/2	1 只



电源插座箱

壳体尺寸	300*520*160mm
SF-324	4 只
CDB2-100/3	1 只
DZ47LE-32/3	4 只



组合电源插座箱

A+B+B	
SFN-315	3 只
SFN-312	3 只
DZ47-16/3	3 只
DZ47-16/1	3 只



电源插座箱

壳体尺寸	300*520*160mm
SFN-3132	6 只
DZ47LE-60/2	1 只
DZ47-40/3	4 只



电源插座箱

壳体尺寸	300*400*160mm
SFN-313	3 只
SFN-324	1 只
SFN-334	1 只
CDB2-100/3	1 只
DZ47-60/3	1 只
DZ47-32/3	1 只
DZ47-40/1	1 只



电源插座箱

箱体尺寸	300*400*160mm
SF-334	2 只
SF-323	2 只
DZ158-125/3	1 只
DZ158LE-60/3	1 只
DZ158LE-32/1	1 只



电源插座箱

箱体尺寸	280*380*130mm
SFN-312	3 只
SFN-424	2 只
DZ47-32/3	2 只
DZ47-16/1	2 只



电源插座箱

箱体尺寸	300*400*160mm
SFN-324	2 只
DZ47-32/3	2 只
DZ47LE-60/3	1 只



电源插座箱

箱体尺寸	220*340*150mm
SF-314	1 只
SF-313	1 只
DZ47-16/3	1 只
DZ47-16/2	1 只







组合插座箱

A+B+B	
SFN-3132	4 只
DZ47-16/1	4 只
DZ47LE-60/4	1 只



电源插座箱

壳体尺寸	300*520*160mm
SFN-313	2 只
SFN-314	4 只



组合插座箱

A+B+B+B	
SFN-312	2 只
SFN-3142	1 只
SFN-3242	1 只
SFN-3342	1 只
NL1E-60/4	1 只
DZ47-32/3	1 只
DZ47-16/3	1 只
DZ47-16/1	2 只
DZ158-100/4	2 只



组合电源插座箱

A+A+B+B+B	
SFN-335	5 只
指示灯 220V	1 只
CDB2-100/4	1 只
DZ47-60/4	5 只



灯光照明电源箱

壳体尺寸	300*520*160mm
SF-413	15 只
CDB2-100/3	1 只
DZ47-50/1	6 只



组合电源插座箱

A+A+B+B+B+B	
SFN-312	2 只
SFN-313	6 只
SFN-324	2 只
DZ47-100/4	1 只
DZ47-32/3	2 只
DZ47-16/1	8 只



电源插座箱

壳体尺寸	300*520*160mm
SFN-1609	2 只
SFN-5623	2 只
SFN-5823	2 只
DZ47-16/1	2 只
DZ47-16/3	2 只
DZ47-32/3	2 只



电源插座箱

壳体尺寸	300*400*160mm
SFN-313	1 只
SFN-315	2 只
SFN-325	1 只
DZ47-16/1	1 只
DZ47-16/3	2 只
DZ47-32/3	1 只



电源插座箱

箱体尺寸	320*360*160mm
SFN-3132	2 只
SFN-3152	1 只
DZ47-16/1	2 只
DZ47-32/3	1 只
DZ47-60/3	1 只



电源插座箱

箱体尺寸	360*540*180mm
SFN-5623	2 只
SFN-5823	2 只
DZ47-16/4	2 只
DZ47LE-32/4	2 只



不锈钢户外插座箱

箱体尺寸	300*200*400mm
SFN-315	2 只
DZ47:3P 16A	1 只



不锈钢户外插座箱

箱体尺寸	500*700*200mm
SF-314	3 只
SF-324	3 只
DZ47:3P 16A	3 只
DZ47:3P 32A	3 只



主要特点 Main features

・外形美观、安装方便、规格齐全、安全可靠、适用于防水、防尘、防腐蚀等特殊场合
・标准 :IEC60529，EN60309
・防护等级 :IP66
・Beautiful in appeara nce, easy installation, complete specifications, safety and reliable,It's applicable for special, waterproof, dustproof and corrosion-proof location.
・Standard:IEC60529, EN60309
・Degree of Protection: IP66

外形尺寸 Dimensions

回路 Circuit Way	明装 Wall Mounted		
	L(mm)	W(mm)	H(mm)
6way	165	200	100
9way	219	200	100
12way	273	230	110
18way	381	230	110
24way	273	380	110
36way	381	380	110





箱体可根据客户需要定制或内加装其它电器附件
Box can be equipped with others electrical accessories as preferred



主要特点 Main features

- 防水、防蛀、防腐蚀、高绝缘
- 根据客户需求规格开孔，方便安装
- 防燃 ABS 或 PC 材料
- 标准 :IEC60529, EN60309
- 防护等级 :IP65

- Waterproof,dustprrof,corrosion resistance,high strength insulation
- Opening hole according to user requirements,specifications,eass of installation
- Optional flame retardant ABS or PC material plastic
- Standard:IEC60529, EN60309
- Degree of Protection :IP65

外形尺寸 Dimensions

L(mm)	W(mm)	H(mm)
110	80	70
130	80	70
180	80	70
250	80	70
100	100	75
125	125	75
200	150	100
250	150	100
340	220	150
400	300	160
460	270	160
520	300	160
540	360	180

箱体可根据客户需要定制或内加装其它电器附件
Box can be equipped with others electrical accessories as preferred



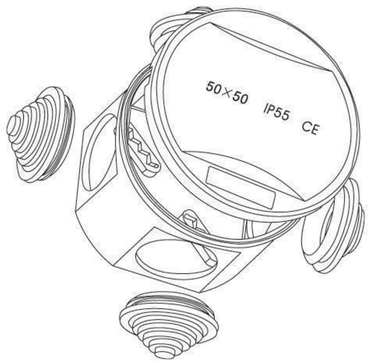

Specification \ Dimension	L	W	H	孔数	IP
SF 50×50	50		50	4	55
SF 80×50	80		50	4	55
SF 85×85×50	85	85	50	7	55
SF 100×100×70	100	100	70	7	65
SF 150×110×70	150	110	70	10	65
SF 150×150×70	150	150	70	8	65
SF 200×100×70	200	155	80	8	65
SF 200×155×80	200	100	70	10	65
SF 225×200×80	255	200	80	12	65
SF 300×250×120	300	250	120	12	65
SF 400×350×120	400	350	120	16	65







尼龙电缆固定头 Nylon cable gland

材质：UL 尼龙 66，防火等级 94V-2，夹紧圈为耐用由橡胶材质。
特点：1、夹紧圈经特殊设计，拉力强，对电机不造成损伤。
2、不须将固定头解体，电缆可直接穿入上紧即可，省时方便，
用途：一般机械控制箱、配电盘、机器、电器等电缆固定用。

Material: Made from UL Nylon 66, 94V-2 and tight ring from rubber.
Feature: 1. Special designation, good strength sile and none damage to electrical machine.
2. Not need to disorganization the fix terminal, cable can be inserted throughdirectly then tighten easy and save time.
Application: Used for machinery control box, distribution plate, machine and electrical. Etc

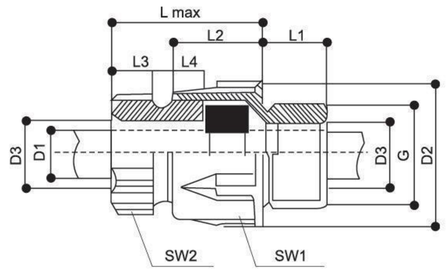

型号 Type	螺纹长度 Thread length L1	进入范围 Entry range D1	螺纹宽度 Entry thread D2	电缆口尺寸 Cable gland dimensions L-L1	防松螺母尺寸 Locknut thread size D3
PG-07	8	3.5-3.6	7	23-8	16.5
PG-09	8	4.5-7	10.2	25-8	21.5
PG-11	8	5.5-10	11.5	27-8	25
PG-13.5	9	9-13	13.5	28-9	27
PG-16	10	10-14	16.5	30-10	30
PG-19	10	14-18	30	10-12	28
PG-21	11	14-18	21	38-11	37.5
PG-25	11	18-25	25	13-18	36
PG-29	11	18-25	27.5	42-11	47.5
PG-36	12	25-33	34.5	43-12	58
PG-42	13	30-38	40.5	48-13	65
PG-48	14	37-44	45.5	48-14	70
PG-63	27	42-50	60	13-18	36

型号 Type	标准螺牙 Threaded entry metric	适用电缆 Cable range ⌀	螺纹外径 Thread o.d.c1	机板口径 Panel mounting hole	螺纹长度 Thread length C2	密封螺母尺寸 Sealing nutsize F	防松螺母尺寸 Locknut size A
MG-12	M12×1.25	7.6-4.6	12	12.5	8.5	19	18
MG-14	M14×1.25	7.6-4.6	14	14.5	8.5	20	19
MG-16	M16×1.5	10-6	16	16.5	15	22	22
MG-18	M18×1.5	10-6	18	18.5	15	25	22
MG-20	M20×1.5	14-9	20	20.5	15	27	27
MG-24	M24×1.5	14-9	24	24.5	15	33	27
MG-25	M25×1.5	18-13	25	25.5	15	33	33
MG-27	M27×1.5	18-13	27	27.5	15	35	35
MG-32	M32×1.5	25-18	32	33	15	41	41
MG-36	M36×1.5	25-18	36	36.5	20	45	41
MG-40	M40×1.5	30-24	40	41	20	50	50
MG-50	M50×1.5	39-30	50	51	22	62	61
MG-63	M63×1.5	48.5-40	63	64	25	75	75

IP67 插头保护盖



SF 系列暗装简易开孔图

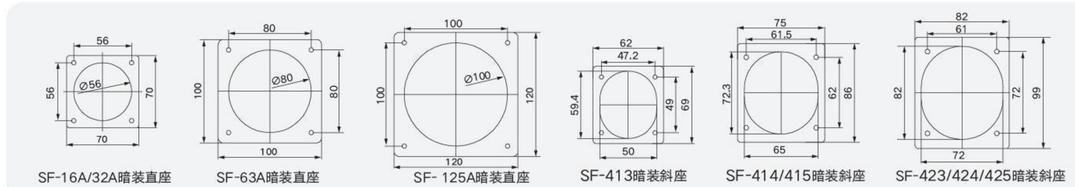

SFN 系列暗装简易开孔图

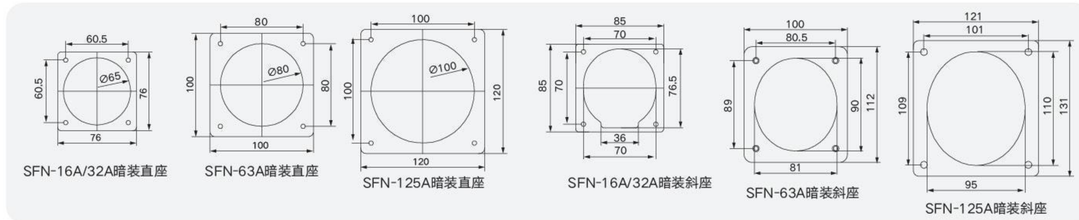

SFK 系列暗装简易开孔图

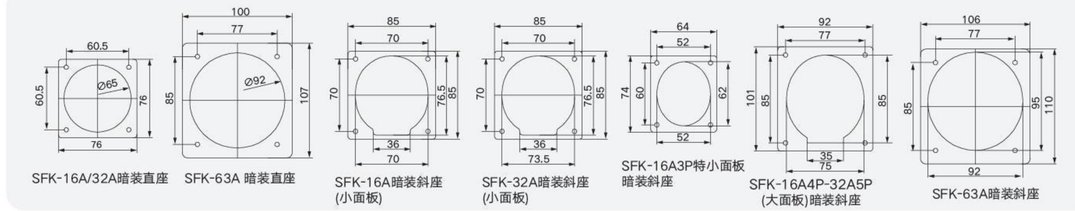

多功能插座简易开孔图



以上仅为简易开孔图，实际开孔以实物为准。